

PSLBB

LED BILLBOARD LIGHT

PROJECT

TYPE

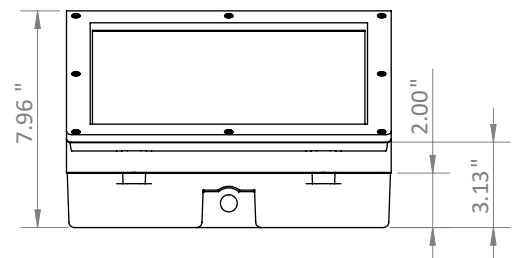
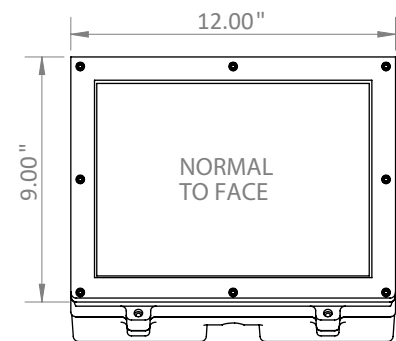
SPECIFICATION

- Field-repairable and field-upgradable to provide a long-lasting solution
- Unique built-in module to allow field-selectable 4 levels of lumen output for optimum illumination
- 20kV standard surge protection with additional built-in backup 4kV/6kV surge protection integrated
- Precision injected molded PMMA acrylic material utilizing refractive technology that will not yellow over time like polycarbonate materials
- Energy efficient light engine is mounted to an aluminum heat sink for maximum heat transfer
- Easily installs on existing mounting poles
- Limited material warranty for 10 years

- 5000K
- IP65 Rated
- DLC Listed
- UL1598 Listed (E486219)
- L90 > 60,000 hrs
- 100-277 V ; 50/60Hz
- >.97 Power Factor
- <15% Total Harmonic Distortion (Typical)
- 40° Min. to 45° Max. Temperature



Weight (lb.): 17.0




Ordering Information

Example: PSLBB/1/G/00

| Fixture | Drive Current | CCT | Reserved |
|---------|---|-----------------------|----------|
| PSLBB | 4 - 40 w 6 - 60 w 8 - 80 w 1 - 105 w | G - Grey B - Brown | 00 |

| Fixture | Product Code | | | Lumen Output | Luminaire Efficiency (LPW) | Standard CRI |
|---------|---------------------|---------------|----------------|--------------|----------------------------|--------------|
| | Input Power (Watts) | Input Voltage | Frequency (Hz) | | | |
| PSLBB | 40 | 100 - 277 | 50/60 | 5000 | 123 | 70+ |
| | 60 | | | 7100 | 118 | |
| | 80 | | | 9100 | 114 | |
| | 105 | | | 11000 | 105 | |



PSLBB**LED BILLBOARD LIGHT**


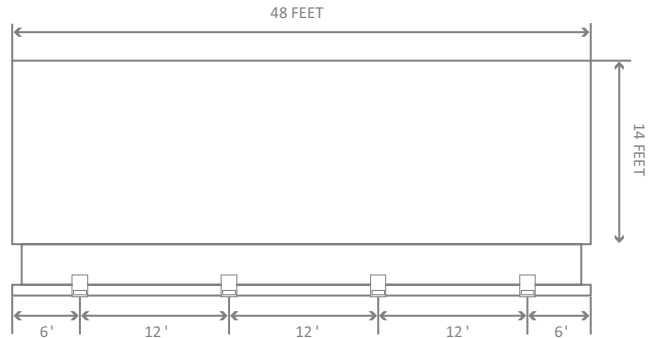
PROJECT _____

TYPE _____


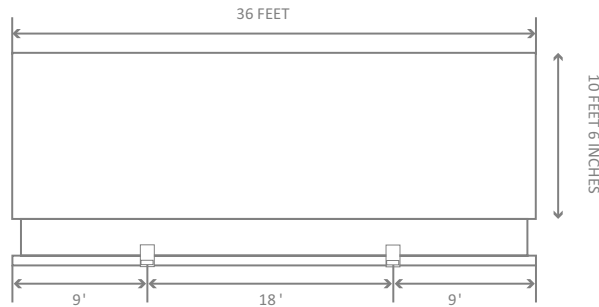
SPECIFICATION _____

14' x 48' BULLETIN


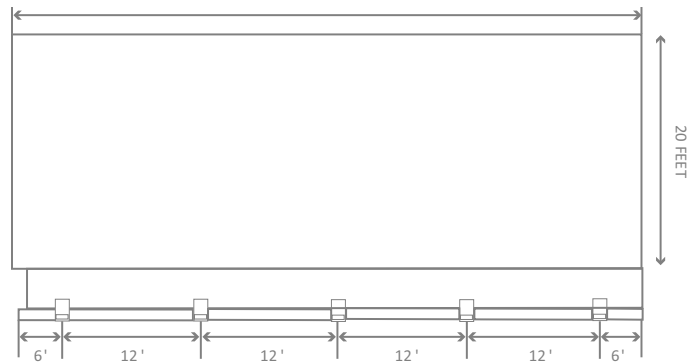
Best results: Install each fixture approximately 3 feet down from the base of the copy and 4 to 6 feet from the face.

**10.6' x 36' BULLETIN**


Best results: Install each fixture approximately 3 feet down from the base of the copy and 4 to 6 feet from the face.

**20' x 60' BULLETIN**

Best results: Install each fixture approximately 3 feet down from the base of the copy and 4 to 6 feet from the face.

**POSTER PANEL**

Best results: Install each fixture approximately 2 to 3 feet down from the base of the copy and 4 to 6 feet out from the face. Space one fixture in the center of the face.



INSTALL ON CENTER OF FACE

