



**IMPORTANT:** Read **ALL** instructions before starting installation. Save instructions for later use.  
**CAUTION:** To reduce risk of shock, **TURN OFF ELECTRICAL SUPPLY** before installing/servicing track.  
**WARNING:** **TRACK** must be installed with its intended use and in accordance of National Electrical Code (NEC) and/or any local codes. *Failure to do so may result in serious injury and/or damage.*

### Recommended Tools

**Screw Driver**



**Wire Stripper**




**Wing Nuts**



### Safety Instructions

- Observe and follow all label information and instructions regarding dry, damp and wet location listings, proper lamp type and wattage, warnings of installation near combustible materials and/or insulation.
- Turn off power at circuit breaker before attempting to install or perform maintenance on the fixtures.
- Be sure to connect ground wire to prevent electric shock or other potential hazards.
- The product must be installed in a manner consistent with the intended use and in compliance with the national electrical codes and local codes.
- **WARNING: RISK OF FIRE.**  
 Most dwellings built before 1985 have supply wire rated for 60°C. Consult a qualified electrician before installation. The fixture must be connected with supply wire rated for at least 75°C.
- Use only Solais Lighting components listed for use with this fixture. Use of components other than those listed by Solais Lighting is a violation of N.E.C. 110-3(B) and voids all warranties. Use **ONLY** with proper Solais Lighting modules.

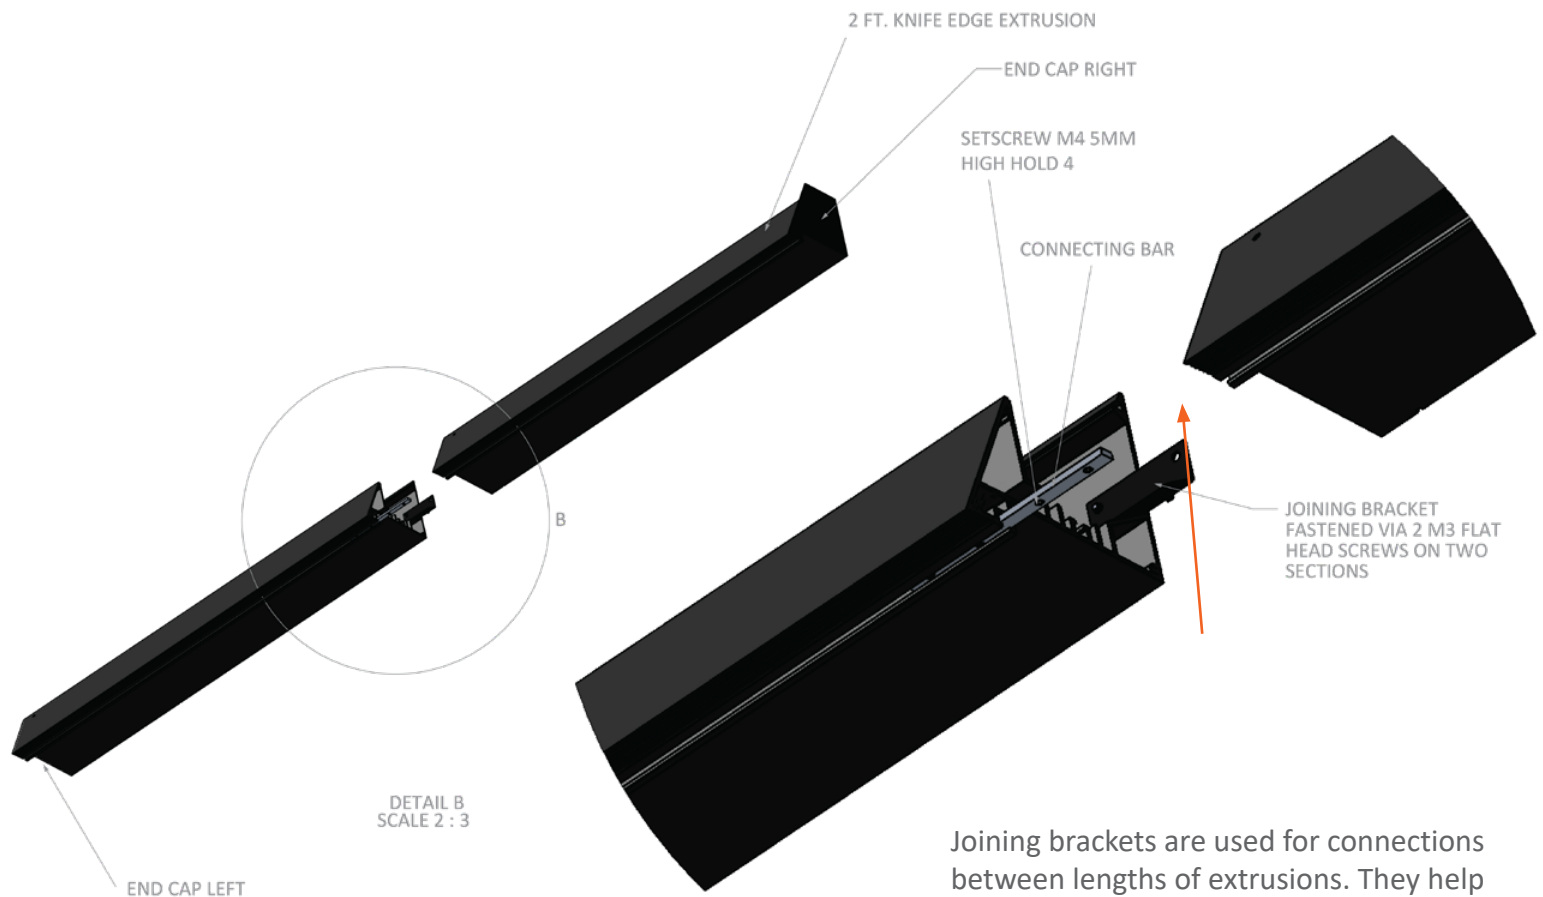

Joining brackets are used for connections between lengths of extrusions. They help keep lengths aligned and prevent gaps.

Install brackets into the end of the housing or corner before adding any additional sections. The joining hardware slides halfway into each extrusion. Screw in bracket to each extrusion to secure in place.

Install end caps where the end of the extrusion is exposed.

