

PROJECT

SPECIFIER

SPECIFICATION

TYPE

### MAIN FEATURES

- 95 CRI Standard
- Designed for use in display cases and shelves; perfect for retrofitting jewelry showcases
- Standard design with rotatable end-caps for aiming
- Allows for daisy chain installation off one power supply

### ELECTRICAL + CONTROLS

- Class 2 Low voltage connection, minimizing shock hazard
- Requires 24V external power supply (sold separately)
- Dimming available with dimming power supply; See power supply product sheet for dimming information

### CONSTRUCTION

- Shatter resistant polycarbonate lens

### OPTICS + PERFORMANCE

- Fixture life: 60,000 Hours (L70)

### RATINGS + CERTIFICATIONS

- UL Type C Listed for damp locations
- RoHS-compliant
- NSF Certified

### WARRANTY


- 5-year warranty



Nominal Length	Max. Overall Length (MOL)		Output	Power (Watts)
	T5	T8		
60"	57.6"	59.6"	3400	30.0
			2000	18.0
			1000	9.0
48"	45.8"	47.8"	3000	26.0
			1600	15.0
			1000	9.0
36"	34.0"	35.8"	2600	23.0
			1200	11.0
			600	5.5
24"	22.2"	23.8"	2000	18.0
			1000	9.0
			500	4.5
18"	17.8"	17.8"	600	5.5
			500	4.5
12"	11.7"	11.7"	500	4.5

\*Output and power in table to left is shown at 3500K. Use multiplier table below for correction factors.

CCT	Multiplier
2700K	0.93
3000K	0.97
3500K	1.0
4000K	1.02
5000K	1.03

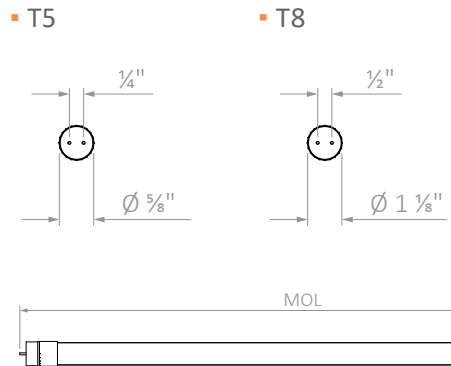

### Ordering Information Example: CST5/48/D/930/1600

Fixture	Lens	CRI + CCT	Length	Lumen Output
CST5	D - Diffused	927 - 90+ CRI, 2700K 930 - 90+ CRI, 3000K 935 - 90+ CRI, 3500K 940 - 90+ CRI, 4000K 950 - 90+ CRI, 5000K	12	500
CST8			18	600
			24	2000 1000 500
			36	2600 1200 600
			48	3000 1600 1000
			60	3400 2000 1000

\*Consult factory for lead time and availability