

**MAIN FEATURES**

- Designed for hanging suspension mounted applications
- Concealed adapter option available; Great for use in architectural and high-end applications
- Field-cutable for custom lengths
- 0-10V dimming down to 1% with GPx and GPxc-type adapters
- Phase cut dimming with Gx-type adapter

**ELECTRICAL + SAFETY**

- 120VV, 16A
- 1900W maximum load
- Up to 55 lb. load per 3 ft. section with 2 mounting points
- Up to 22 lb. load per 8 ft. section with 2 mounting points

**CONSTRUCTION + FINISH**

- Extruded thermoplastic insulated
- 12 AWG solid copper conductors
- Insulated extruded body in PVC

**RATINGS + CERTIFICATIONS**

- UL Certified for dry locations
- RoHS-compliant
- Designed for use with Solais® Gx, GPx and GPxc-type fixtures and components

**WARRANTY**

- 1-year warranty



Ordering Information

Track	Voltage	Circuits	Shape	Length	Finish
GP	1 - 120V	3 - 3-circuit/ 1-neutral	SH	4 - 4 ft. Track 8 - 8 ft. Track 12 - *12 ft. Track (drop-ship only)	PW - White BK - Black

Accessories + Components
GP-UM-TCV - Track Cover
GP-SH-ECC - End Cap
GP-SH-LJB - Long Joining Bracket



**Accessories + Components**

- GP-UM-TCV - Track Cover
- GP-SH-ECC - End Cap
- GP-SH-LJB - Long Joining Bracket

- GPXX-UM-SJC - Straight Joining Connector
- GPXX-UM-SIC - Straight Insulating Connector (Mechanical)

- GP13-SH-EFR - End Feed (Right Polarity)
- GP13-SH-EFL - End Feed (Left Polarity)
- GP13-SH-SFC - Straight Feedable Connector
- GP13-SH-LFI - 'L' Feed (Inner Polarity)
- GP13-SH-LFO - 'L' Feed (Outer Polarity)
- GP13-SH-TOL - 'T' Feed (Outer + Left Polarity)
- GP13-SH-TOR - 'T' Feed (Outer+ Right Polarity)
- GP13-SH-TIL - 'T' Feed (Inner + Left Polarity)
- GP13-SH-TIR - 'T' Feed (Inner + Right Polarity)
- GP13-SH-XFC - 'X' Feed Connector

Accessories + Components
SS-UM-TST - T-bar Seismic Suspension Clip
SS-UM-ACL - Aircraft cable with Loop; 20 ft.
SS-UM-ACB - Aircraft cable with Barrel; 20 ft.
SS-UM-SEG - Side Cable Exit Gripper
SS-UM-SMC - Surface Mount Cable Gripper
SS-UM-DLG - Double Mechanism Looping Gripper
GP-UM-TCT - Cutting Tool

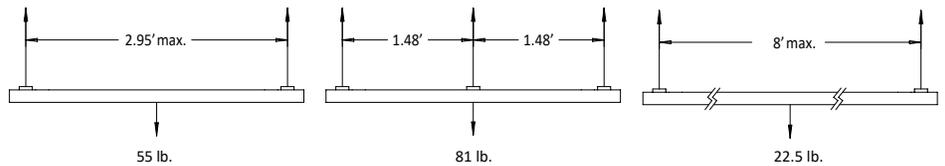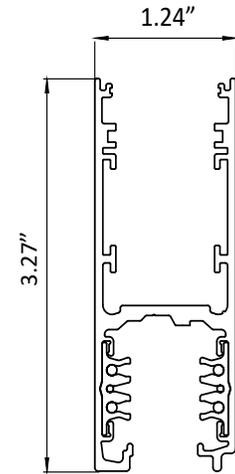

Gaia+ SH Components			Gaia+ Connectors		
<b>GP-UM-TCV</b> Track Cover PVC body; Length: 1000 mm			<b>GP13-SH-LFI</b> Polarized 'L' Feed (Inner) Polycarbonate body, copper alloy contacts		
<b>GP-SH-ECC</b> End Cap Polycarbonate body with locking screw			<b>GP13-SH-LFO</b> Polarized 'L' Feed (Outer) Polycarbonate body, copper alloy contacts		
<b>GP-SH-LJB</b> Long Joining Bracket for aircraft cable suspension. Recommended for use with SS-UM-SEG			<b>GP13-SH-TOL</b> Polarized 'T' Feed (Outer + Left) Polycarbonate body, copper alloy contacts		
<b>GPXX-UM-SJC</b> Polarized Joining Connector Polycarbonate body, copper alloy contacts			<b>GP13-SH-TOR</b> Polarized 'T' Feed (Outer+ Right) Polycarbonate body, copper alloy contacts		
<b>GPXX-UM-SIC</b> Straight Insulating Connector Polycarbonate body			<b>GP13-SH-TIL</b> Polarized 'T' Feed (Inner + Left) Polycarbonate body, copper alloy contacts		
<b>GP13-SH-EFR</b> Polarized Live End Feed (Right) Polycarbonate body, copper alloy contacts			<b>GP13-SH-TIR</b> Polarized 'T' Feed (Inner + Right) Polycarbonate body, copper alloy contacts		
<b>GP13-SH-EFL</b> Polarized Live End Feed (Left) Polycarbonate body, copper alloy contacts			<b>GP13-SH-XFC</b> Polarized 'X' Feed Polycarbonate body, copper alloy contacts		
<b>GP13-SH-SFC</b> Straight Feedable Connector Polycarbonate body, copper alloy contacts					



Track Suspension Accessories		
SS-UM-TSC	T-bar Seismic Suspension Clamp <i>For use where local code requires direct connection to the ceiling. Ceiling-supported clip for 15/16" T-bar</i>	
SS-UM-ACL	Aircraft Cable with Loop <i>20 feet of galvanized cable. Recommended for use with SS-UM-SEG.</i>	
SS-UM-ACB	Aircraft Cable with Barrel <i>20 feet of galvanized cable. Recommended for use with SS-UM-SEG.</i>	
SS-UM-SEG	Side Cable Exit Gripper <i>Recommended for use with SS-UM-ACL or SS-UM-ACB.</i>	
SS-UM-SMC	Surface Mount Cable Coupler <i>2-part non-adjustable cable coupler. Recommended for use with SS-UM-ACB.</i>	
SS-UM-DLG	Double Mechanism Looping Gripper <i>Double-ended gripper with double side cable exit. Recommended for use with SS-UM-ACB or SS-UM-ACL.</i>	

Gaia+ Accessories	
SS-UM-CPC Ceiling cup with ceiling bracket and screw gripper <i>For use with cable suspension. Recommended for use with SS-UM-ACB.</i>	
GP-UM-TCT Cutting Tool <i>for track conductors. Steel</i>	

