

PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_

SPECIFIER \_\_\_\_\_ MEMO \_\_\_\_\_


ORDERING CODE BREAKDOWN

# GAIA+ GPCR

ROUND SURFACE MOUNT | SUSPENSION  
120V | 3C/1N TRACK

**MAIN FEATURES**

- Designed for hanging suspension mounted applications
- Concealed adapter option available; Great for use in architectural and high-end applications
- Field-cuttable for custom lengths
- 0-10V dimming down to 1% with GP and GPC-type adapters
- Phase cut dimming with G-type adapter

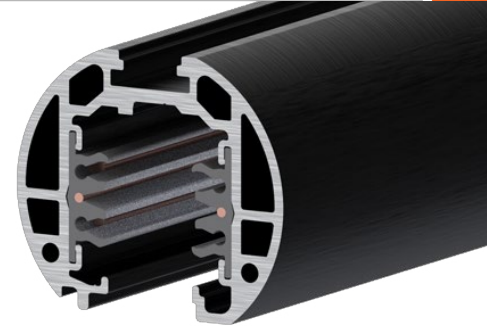

Ordering Information

<b>Track</b> GP	<b>Voltage</b> 1 - 120V	<b>Circuits</b> 3 - 3-circuit/ 1-neutral	<b>Shape</b> CR	<b>Length</b> 4 - 4 ft. Track 8 - 8 ft. Track	<b>Finish</b> PW - White BK - Black
--------------------	----------------------------	--	--------------------	---	---

<b>Finish</b> PW - White BK - Black
---

- SS-UM-TST - T-bar Seismic Suspension Clip
- SS-UM-ACL - Aircraft cable with Loop; 20 ft.
- SS-UM-ACB - Aircraft cable with Barrel; 20 ft.
- SS-UM-SEG - Side Cable Exit Gripper
- SS-UM-SMC - Surface Mount Cable Gripper
- SS-UM-DLG - Double Mechanism Looping Gripper
- SS-UM-USC - Uni-Strut Cable Coupler
- GP-UM-TCT - Cutting Tool

**Accessories + Components**

- GP-UM-TCV - Track Cover
- GP-CR-ECC - End Cap
- GPXX-UM-SJC - Straight Joining Connector
- GPXX-UM-SIC - Straight Insulating Connector (Mechanical)
- GP13-CR-EFR - End Feed (Right Polarity)
- GP13-CR-EFL - End Feed (Left Polarity)
- GP13-CR-LFI - 'L' Feed (Inner Polarity)
- GP13-CR-LFO - 'L' Feed (Outer Polarity)
- GP13-CR-TOL - 'T' Feed (Outer + Left Polarity)
- GP13-CR-TOR - 'T' Feed (Outer+ Right Polarity)
- GP13-CR-TIL - 'T' Feed (Inner + Left Polarity)
- GP13-CR-TIR - 'T' Feed (Inner + Right Polarity)
- GP13-CR-XFC - 'X' Feed Connector

**ELECTRICAL + SAFETY**

- 120V, 16A
- 1900W maximum load
- Up to 55 lb. load per 3 ft. section with 2 mounting points
- Up to 22 lb. load per 8 ft. section with 2 mounting points

**RATINGS + CERTIFICATIONS**



- UL Certified for dry locations
- RoHS-compliant
- Designed for use with Solais® G-, GP- and GPC-type fixtures and components

**WARRANTY**


- 1-year warranty

**CONSTRUCTION + FINISH**





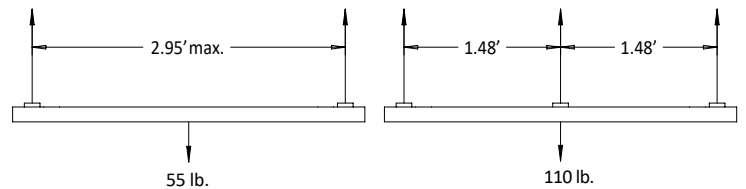


- Extruded thermoplastic insulated
- 12 AWG solid copper conductors
- Insulated extruded body in PVC







<b>Track</b> GP13-UM-CER - End Feed (Right Polarity)	<b>GP13-UM-CEL - End Feed (Left Polarity)</b>	<b>Circuit Breaker 1</b> 005 - 60W, 0.5A 010 - 120W, 1A 025 - 300W, 2.5A 050 - 600W, 5A 075 - 900W, 7.5A 100 - 1200W, 10A	<b>Circuit Breaker 2</b> 005 - 60W, 0.5A 010 - 120W, 1A 025 - 300W, 2.5A 050 - 600W, 5A 075 - 900W, 7.5A 100 - 1200W, 10A	<b>Circuit Breaker 3</b> 005 - 60W, 0.5A 010 - 120W, 1A 025 - 300W, 2.5A 050 - 600W, 5A 075 - 900W, 7.5A 100 - 1200W, 10A
---	---	---	---	---



Gaia+ Connectors		Gaia+ Connectors	
<b>GP-UM-TCV</b> Track Cover PVC body; Length: 1000 mm			
<b>GP-CR-ECC</b> End Cap Polycarbonate body with locking screw			
<b>GPxx-UM-SJC</b> Polarized Joining Connector Polycarbonate body, copper alloy contacts			
<b>GPxx-UM-SIC</b> Insulating Connector Polycarbonate body			
<b>GP13-CR-EFR</b> Polarized Live End Feed (Right) Polycarbonate body, copper alloy contacts			
<b>GP13-CR-EFL</b> Polarized Live End Feed (Left) Polycarbonate body, copper alloy contacts			
<b>GP13-CR-LFI</b> Polarized 'L' Feed (Inner) Polycarbonate body, copper alloy contacts			
<b>GP13-CR-LFO</b> Polarized 'L' Feed (Outer) Polycarbonate body, copper alloy contacts			
<b>GP13-CR-TOL</b> Polarized 'T' Feed (Outer + Left) Polycarbonate body, copper alloy contacts			
<b>GP13-CR-TOR</b> Polarized 'T' Feed (Outer + Right) Polycarbonate body, copper alloy contacts			
<b>GP13-CR-TIL</b> Polarized 'T' Feed (Inner + Left) Polycarbonate body, copper alloy contacts			
<b>GP13-CR-TIR</b> Polarized 'T' Feed (Inner + Right) Polycarbonate body, copper alloy contacts			
<b>GP13-CR-XFC</b> Polarized 'X' Feed Polycarbonate body, copper alloy contacts			
<b>GP13-UM-CER</b> Current Limiting End Feed (Right Polarity) Polycarbonate body, copper alloy contacts			
<b>GP13-UM-CEL</b> Current Limiting End Feed (Left Polarity) Polycarbonate body, copper alloy contacts			

Track Suspension Accessories		
SS-UM-TSC	T-bar Seismic Suspension Clamp <i>For use where local code requires direct connection to the ceiling. Ceiling-supported clip for 15/16" T-bar</i>	
SS-UM-ACL	Aircraft Cable with Loop <i>20 feet of galvanized cable. Recommended for use with SS-UM-SEG.</i>	
SS-UM-ACB	Aircraft Cable with Barrel <i>20 feet of galvanized cable. Recommended for use with SS-UM-SEG.</i>	
SS-UM-SEG	Side Cable Exit Gripper <i>Recommended for use with SS-UM-ACL or SS-UM-ACB.</i>	
SS-UM-SMC	Surface Mount Cable Coupler <i>2-part non-adjustable cable coupler. Recommended for use with SS-UM-ACB.</i>	
SS-UM-DLG	Double Mechanism Looping Gripper <i>Double-ended gripper with double side cable exit. Recommended for use with SS-UM-ACB or SS-UM-ACL.</i>	
SS-UM-SBK	Seismic/Sway Bracing Kit <i>Cross clamps and Snap hooks for connecting to Eye-bolt by others. Recommended for use with SS-UM-ACB</i>	
SS-UM-USC	Uni-Strut Cable Coupler <i>4-part non-adjustable cable coupler. Recommended for use with SS-UM-ACB</i>	

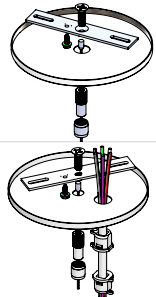Track Suspension Accessories		
SS-UM-ACK	Air-Craft Cable Canopy Kit J-box Mount <i>5" diameter canopy, 20ft aircraft cable</i>	
SS-UM-MCK	Single-Circuit Cable Canopy Kit Feed J-box Mount <i>5" diameter canopy, 20ft aircraft cable, 5-wire power feed</i>	

Gaia+ Accessories		
GP-CR-SPB Short Pendant Bracket <i>Aluminum; For aircraft Cable Suspension; Recommended for use with SS-U-SEG</i>		
SS-UM-CPC Ceiling cup with ceiling bracket and screw gripper <i>For use with cable suspension. Recommended for use with SS-UM-ACB.</i>		
GP-UM-TCT Cutting Tool <i>for track conductors. Steel</i>	