

PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_

SPECIFIER \_\_\_\_\_ MEMO \_\_\_\_\_

ORDERING CODE BREAKDOWN

### MAIN FEATURES

- Designed for recessed with flange mounted applications
- Concealed adapter option available; Great for use in architectural and high-end applications
- Field-cuttable for custom lengths
- 0-10V dimming down to 1% with GP and GPC-type adapters
- Phase cut dimming with G-type adapter



### Ordering Information

| Track | Voltage  | Circuits   | Shape | Length                             | Finish                   |
|-------|----------|--|-------|------------------------------------|--------------------------|
| GP    | 1 - 120V | 3 - 3-circuit/1-neutral<br>2 - 2-circuit/2-neutral | SH    | 4 - 4 ft. Track<br>8 - 8 ft. Track | PW - White<br>BK - Black |
|       | 2 - 277V | 2 - 2-circuit/2-neutral                            |       |                                    |                          |

### ELECTRICAL + SAFETY

- 120V, 16A
- 1900W maximum load
- Up to 55 lb. load per 3 ft. section with 2 mounting points
- Up to 22 lb. load per 8 ft. section with 2 mounting points

### RATINGS + CERTIFICATIONS

- UL Certified for dry locations
- RoHS-compliant
- Designed for use with Solais® G-, GP- and GPC-type fixtures and components

### WARRANTY

- 1-year warranty

### CONSTRUCTION + FINISH

- Extruded thermoplastic insulated
- 12 AWG solid copper conductors
- Insulated extruded body in PVC



- SS-UM-TST - T-bar Seismic Suspension Clip
- SS-UM-ACL - Aircraft cable with Loop; 20 ft.
- SS-UM-ACB - Aircraft cable with Barrel; 20 ft.
- SS-UM-SEG - Side Cable Exit Gripper
- SS-UM-SMC - Surface Mount Cable Gripper
- SS-UM-DLG - Double Mechanism Looping Gripper
- SS-UM-USC - Uni-Strut Cable Coupler

GP-UM-TCT - Cutting Tool





### Accessories + Components

- GP-UM-TCV - Track Cover
- GP-SH-ECC - End Cap
- GP-SH-LJB - Long Joining Bracket
- GPxx-UM-SJC - Straight Joining Connector
- GPxx-UM-SIC - Straight Insulating Connector (Mechanical)
- GPxx-SH-EFR - End Feed (Right Polarity)
- GPxx-SH-EFL - End Feed (Left Polarity)
- GPxx-SH-SFC - Straight Feedable Connector
- GPxx-SH-LFI - 'L' Feed (Inner Polarity)
- GPxx-SH-LFO - 'L' Feed (Outer Polarity)
- GPxx-SH-TOL - 'T' Feed (Outer + Left Polarity)
- GPxx-SH-TOR - 'T' Feed (Outer + Right Polarity)
- GPxx-SH-TIL - 'T' Feed (Inner + Left Polarity)
- GPxx-SH-TIR - 'T' Feed (Inner + Right Polarity)
- GPxx-SH-XFC - 'X' Feed Connector

GP13/GP22




GP12/GP22

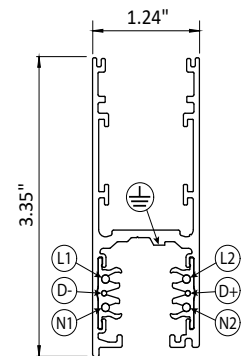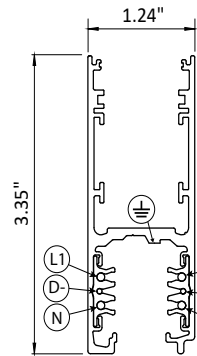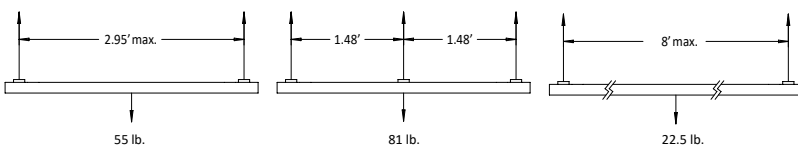



|         |      |
|---------|------|
| PROJECT | TYPE |
|---------|------|

| Gaia+ SH Components   |  |  | Gaia+ Connectors   |  |  |
|---|--|--|--|--|--|
| <b>GP-UM-TCV</b><br>Track Cover<br>PVC body;<br>Length: 1000 mm   |  |  | <b>GPxx-SH-LFI</b><br>Polarized 'L' Feed (Inner)<br>Polycarbonate body,<br>copper alloy contacts         |  |  |
| <b>GP-SH-ECC</b><br>End Cap<br>Polycarbonate body<br>with locking screw   |  |  | <b>GPxx-SH-LFO</b><br>Polarized 'L' Feed (Outer)<br>Polycarbonate body,<br>copper alloy contacts         |  |  |
| <b>GP-SH-LJB</b><br>Long Joining Bracket<br>for aircraft cable suspension.<br>Recommended for use with<br>SS-UM-SEG |  |  | <b>GPxx-SH-TOL</b><br>Polarized 'T' Feed (Outer + Left)<br>Polycarbonate body,<br>copper alloy contacts  |  |  |
| <b>GPxx-UM-SJC</b><br>Polarized Joining Connector<br>Polycarbonate body,<br>copper alloy contacts                   |  |  | <b>GPxx-SH-TOR</b><br>Polarized 'T' Feed (Outer+ Right)<br>Polycarbonate body,<br>copper alloy contacts  |  |  |
| <b>GPxx-UM-SIC</b><br>Straight Insulating Connector<br>Polycarbonate body   |  |  | <b>GPxx-SH-TIL</b><br>Polarized 'T' Feed (Inner + Left)<br>Polycarbonate body,<br>copper alloy contacts  |  |  |
| <b>GPxx-SH-EFR</b><br>Polarized Live End Feed (Right)<br>Polycarbonate body,<br>copper alloy contacts               |  |  | <b>GPxx-SH-TIR</b><br>Polarized 'T' Feed (Inner + Right)<br>Polycarbonate body,<br>copper alloy contacts |  |  |
| <b>GPxx-SH-EFL</b><br>Polarized Live End Feed (Left)<br>Polycarbonate body,<br>copper alloy contacts                |  |  | <b>GPxx-SH-XFC</b><br>Polarized 'X' Feed<br>Polycarbonate body,<br>copper alloy contacts                 |  |  |
| <b>GPxx-SH-SFC</b><br>Straight Feedable Connector<br>Polycarbonate body,<br>copper alloy contacts                   |  |  |  |  |  |

| Track Suspension Accessories |  |   |
|------------------------------|--|---|
| SS-UM-TSC                    | T-bar Seismic Suspension Clamp<br><i>For use where local code requires direct connection to the ceiling. Ceiling-supported clip for 15/16" T-bar</i> |    |
| SS-UM-ACL                    | Aircraft Cable with Loop<br><i>20 feet of galvanized cable. Recommended for use with SS-UM-SEG.</i>  |    |
| SS-UM-ACB                    | Aircraft Cable with Barrel<br><i>20 feet of galvanized cable. Recommended for use with SS-UM-SEG.</i>  |    |
| SS-UM-SEG                    | Side Cable Exit Gripper<br><i>Recommended for use with SS-UM-ACL or SS-UM-ACB.</i>   |   |
| SS-UM-SMC                    | Surface Mount Cable Coupler<br><i>2-part non-adjustable cable coupler. Recommended for use with SS-UM-ACB.</i>                                       |  |
| SS-UM-DLG                    | Double Mechanism Looping Gripper<br><i>Double-ended gripper with double side cable exit. Recommended for use with SS-UM-ACB or SS-UM-ACL.</i>        |  |
| SS-UM-SBK                    | Seismic/Sway Bracing Kit<br><i>Cross clamps and Snap hooks for connecting to Eye-bolt by others. Recommended for use with SS-UM-ACB</i>              |  |
| SS-UM-USC                    | Uni-Strut Cable Coupler<br><i>4-part non-adjustable cable coupler. Recommended for use with SS-UM-ACB</i>  |  |

| Track Suspension Accessories |   |   |
|------------------------------|---|---|
| SS-UM-ACK                    | Air-Craft Cable Canopy Kit J-box Mount<br><i>5" diameter canopy, 20ft aircraft cable</i>                              |  |
| SS-UM-MCK                    | Single-Circuit Cable Canopy Kit Feed J-box Mount<br><i>5" diameter canopy, 20ft aircraft cable, 5-wire power feed</i> |   |

| Gaia+ Accessories  |   |
|--|---|
| SS-UM-CPC<br>Ceiling cup with ceiling bracket and screw gripper<br><i>For use with cable suspension. Recommended for use with SS-UM-ACB.</i> |    |
| GP-UM-TCT<br>Cutting Tool<br><i>for track conductors. Steel</i>  |  |