


GAIA+ GPST

SURFACE MOUNT | SUSPENSION
120/277V | 2C/2N + 3C/1N TRACK

MAIN FEATURES

- Designed for surface mount and hanging suspension mounted applications
- Concealed adapter option available; Great for use in architectural and high-end applications
- Field-cutable for custom lengths
- 0-10V dimming down to 1% with GP and GPC-type adapters
- Phase cut dimming with G-type adapter

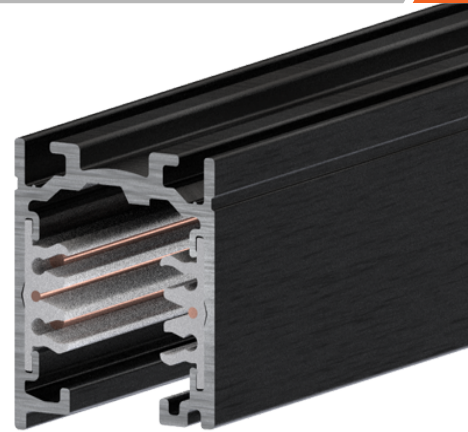

Ordering Information

Track GP	Voltage 1 - 120V 2 - 277V	Circuits 3 - 3-circuit/1-neutral 2 - 2-circuit/2-neutral 2 - 2-circuit/2-neutral	Shape ST	Length 4 - 4 ft. Track 8 - 8 ft. Track	Finish PW - White BK - Black GY - Grey
--------------------	--	--	--------------------	---	--

Finish PW - White BK - Black	Track GP-UM	Suspension Stem Length ST12 - 12" ST18 - 18" ST24 - 24" ST36 - 36" ST48 - 48"	Finish PW - White BK - Black
---	-----------------------	---	---

Accessories + Components

- GP-UM-TCV - Track Cover
- GP-ST-ECC - End Cap
- GPxx-UM-SJC - Straight Joining Connector
- GPxx-UM-SIC - Straight Insulating Connector (Mechanical)
- GPxx-UM-ACR - Adjustable Corner
- GPxx-UM-EFR - End Feed (Right Polarity)
- GPxx-UM-EFL - End Feed (Left Polarity)
- GPxx-UM-SFC - Straight Feedable Connector
- GPxx-UM-LFI - 'L' Feed (Inner Polarity)
- GPxx-UM-LFO - 'L' Feed (Outer Polarity)
- GPxx-UM-TOL - 'T' Feed (Outer + Left Polarity)
- GPxx-UM-TOR - 'T' Feed (Outer + Right Polarity)
- GPxx-UM-TIL - 'T' Feed (Inner + Left Polarity)
- GPxx-UM-TIR - 'T' Feed (Inner + Right Polarity)
- GPxx-UM-XFC - 'X' Feed Connector

- SS-UM-TST - T-bar Seismic Suspension Clip
- SS-UM-ACL - Aircraft cable with Loop; 20 ft.
- SS-UM-ACB - Aircraft cable with Barrel; 20 ft.
- SS-UM-SEG - Side Cable Exit Gripper
- SS-UM-SMC - Surface Mount Cable Gripper
- SS-UM-DLG - Double Mechanism Looping Gripper
- SS-UM-USC - Uni-Strut Cable Coupler

GP-UM-TCT - Cutting Tool

- SS-UM-CPC - Ceiling cup with Ceiling Bracket
- GP-UM-LJB - Long Joining Bracket
- GP-UM-TCB - Ceiling Bracket
- GP-ST-ERB - End Reinforcing Bracket for stem suspension
- GP-ST-SRB - Straight Reinforcing Bracket for stem suspension
- GP-ST-LRB - 'L' Reinforcing Bracket for stem suspension
- GP-ST-TRB - 'T' Reinforcing Bracket for stem suspension
- GP-ST-XRB - 'X' Reinforcing Bracket for stem suspension
- GP-ST-TST - Ceiling Clamp for T-bar
- GP-ST-CCT - Suspension Canopy + Track Connection Set

Finish PW - White BK - Black	Circuit Breaker 1 005 - 60W, 0.5A 010 - 120W, 1A 025 - 300W, 2.5A 050 - 600W, 5A 075 - 900W, 7.5A 100 - 1200W, 10A	Circuit Breaker 2 005 - 60W, 0.5A 010 - 120W, 1A 025 - 300W, 2.5A 050 - 600W, 5A 075 - 900W, 7.5A 100 - 1200W, 10A
Track GPxx-UM-CER - End Feed (Right Polarity) GPxx-UM-CEL - End Feed (Left Polarity) GPxx-UM-CMC - Middle Feed		

ELECTRICAL + SAFETY

- 120V, 16A
- 1900W maximum load
- Up to 55 lb. load per 3 ft. section with 2 mounting points
- Up to 22 lb. load per 8 ft. section with 2 mounting points

RATINGS + CERTIFICATIONS

- UL Certified for dry locations
- RoHS-compliant
- Designed for use with Solais® G-, GP- and GPC-type fixtures and components

WARRANTY


- 1-year warranty

CONSTRUCTION + FINISH


- Extruded thermoplastic insulated 12 AWG solid copper conductors
- Insulated extruded body in PVC

* Not all components + accessories are available in Grey finish (GY). Consult Factory for options








GP13



GP12




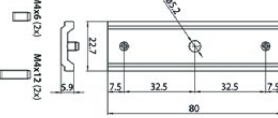





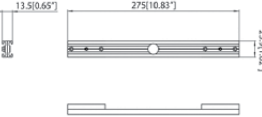







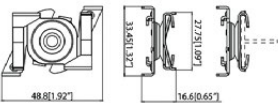





GP22



Gaia+ Connectors			Gaia+ Connectors		
GP-UM-TCV Track Cover PVC body; Length: 1000 mm			GPxx-UM-LFO 'L' Feed (Outer Polarity) Polycarbonate body, copper alloy contacts		
GP-ST-ECC End Cap Polycarbonate body with locking screw			GPxx-UM-TOL 'T' Feed (Outer + Left Polarity) Polycarbonate body, copper alloy contacts		
GPxx-UM-SJC Polarized Joining Connector Polycarbonate body, copper alloy contacts			GPxx-UM-TOR 'T' Feed (Outer+ Right Polarity) Polycarbonate body, copper alloy contacts		
GPxx-UM-SIC Straight Insulating Connector (Mechanical) Polycarbonate body			GPxx-UM-TIL 'T' Feed (Inner + Left Polarity) Polycarbonate body, copper alloy contacts		
GPxx-UM-ACR Adjustable Corner Polycarbonate body, copper alloy contacts			GPxx-UM-TIR 'T' Feed (Inner + Right Polarity) Polycarbonate body, copper alloy contacts		
GPxx-UM-EFR End Feed (Right Polarity) Polycarbonate body, copper alloy contacts			GPxx-UM-XFC 'X' Feed Connector Polycarbonate body, copper alloy contacts		
GPxx-UM-EFL End Feed (Left Polarity) Polycarbonate body, copper alloy contacts			GPxx-UM-CER Current Limiting End Feed (Right Polarity) Polycarbonate body, copper alloy contacts		
GPxx-UM-SFC Straight Feedable Connector Polycarbonate body, copper alloy contacts			GPxx-UM-CEL Current Limiting End Feed (Left Polarity) Polycarbonate body, copper alloy contacts		
GPxx-UM-LFI 'L' Feed (Inner Polarity) Polycarbonate body, copper alloy contacts			GPxx-UM-CMC Current Limiting Middle Feed Polycarbonate body, copper alloy contacts		

* Not all components + accessories are available in Grey finish (GY). Consult Factory for options

PROJECT	TYPE
---------	------

Gaia+ Accessories		
GP-UM-LJB Long Joining Bracket for aircraft cable suspension. Recommended for use with SS-UM-SEG		
GP-UM-TCB Ceiling Bracket		
GP-ST-ERB End Reinforcing Bracket for stem suspension Recommended for use with GP-ST-CCT		
GP-ST-SRB Straight Reinforcing Bracket for stem suspension Recommended for use with GP-ST-CCT		
GP-ST-LRB 'L' Reinforcing Bracket for stem suspension Recommended for use with GP-ST-CCT		
GP-ST-TRB 'T' Reinforcing Bracket for stem suspension Recommended for use with GP-ST-CCT		
GP-ST-XRB 'X' Reinforcing Bracket for stem suspension Recommended for use with GP-ST-CCT		
GP-ST-TST T-bar Slide-on Track Mounting Clip Painted steel; 11 lb. max; Recommended distance between clamps: 29.5"/750 mm		
GP-ST-CCT Canopy + Connector for Track for stem suspension Stem sold separately		
GP-UM-ST __ Threaded Suspension Stem 12", 18", 24", 36" and 48" options Requires GP-ST-CCT		
GP-UM-TCT Cutting Tool for track conductors Steel		


Gaia+ Accessories	
SS-UM-CPC Ceiling cup with ceiling bracket and screw gripper For use with cable suspension Recommended for use with SS-UM-ACB.	



* Not all components + accessories are available in Grey finish (GY). Consult Factory for options

PROJECT	TYPE
---------	------

GAIA+ GPST

SURFACE MOUNT | SUSPENSION
120/277V | 2C/2N + 3C/1N TRACK

Track Suspension Accessories		
SS-UM-TSC	T-bar Seismic Suspension Clamp <i>For use where local code requires direct connection to the ceiling. Ceiling-supported clip for 15/16" T-bar</i>	
SS-UM-ACL	Aircraft Cable with Loop <i>20 feet of galvanized cable. Recommended for use with SS-UM-SEG.</i>	
SS-UM-ACB	Aircraft Cable with Barrel <i>20 feet of galvanized cable. Recommended for use with SS-UM-SEG.</i>	
SS-UM-SEG	Side Cable Exit Gripper <i>Recommended for use with SS-UM-ACL or SS-UM-ACB.</i>	
SS-UM-SMC	Surface Mount Cable Coupler <i>2-part non-adjustable cable coupler. Recommended for use with SS-UM-ACB.</i>	
SS-UM-DLG	Double Mechanism Looping Gripper <i>Double-ended gripper with double side cable exit. Recommended for use with SS-UM-ACB or SS-UM-ACL.</i>	
SS-UM-SBK	Seismic/Sway Bracing Kit <i>Cross clamps and Snap hooks for connecting to Eye-bolt by others. Recommended for use with SS-UM-ACB</i>	
SS-UM-USC	Uni-Strut Cable Coupler <i>4-part non-adjustable cable coupler. Recommended for use with SS-UM-ACB</i>	

Track Suspension Accessories		
SS-UM-ACK	Air-Craft Cable Canopy Kit J-box Mount <i>5" diameter canopy, 20ft aircraft cable</i>	
SS-UM-MCK	Single-Circuit Cable Canopy Kit Feed J-box Mount <i>5" diameter canopy, 20ft aircraft cable, 5-wire power feed</i>	

** Not all components + accessories are available in Grey finish (GY). Consult Factory for options*