

Hoop Chandelier

Custom Order LED Luminaire

PROJECT _____

TYPE _____

SPECIFICATION _____

- / 120/277 V, 50/60 Hz
- / 50,000 Hours (L70)
- / 4' diameter; 47 W or 6' diameter; 70 W
- / 0-10V, programmable, 1% dimming
- / Extruded aluminum housing
- / White frosted acrylic diffuser


- / ETL Certified
- / RoHs-compliant
- / Dry location rated



Ordering Information

Example: HPC4/35K/BK/NC/FA

	/	/	/	/
Fixture HPC4 <i>(4-foot)</i>	CCT 27K - 2700K 30K - 3000K 35K - 3500K	Finish Color PW - Perfect White BK - Black	Mounting NC - Nexus Central	Diffuser FA - Frosted Acrylic
HPC6 <i>(6-foot)</i>				

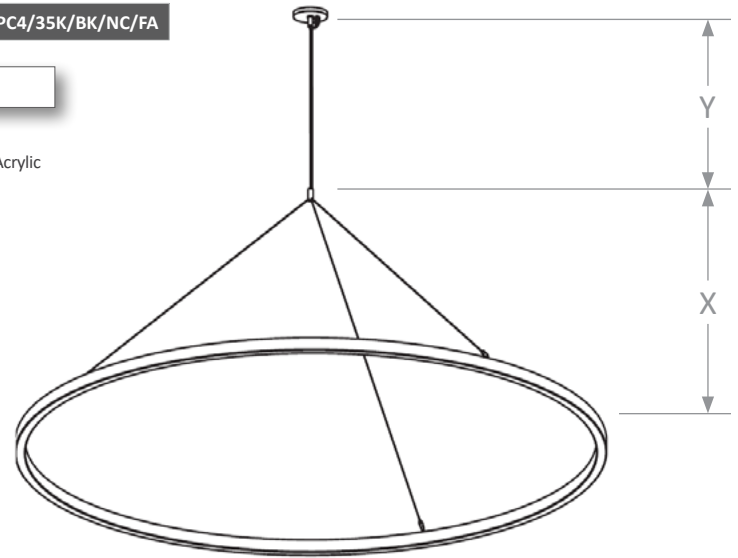

Fixture	X Length	Y Length
HPC4	24"	48" Standard Max
HPC6	20 7/8"	24" Standard Max

*Consult factory for lead time and availability

NOTE: This product is a special order, non-stocked decorative fixture.
Please consult factory for lead times, minimum ordering quantities and pricing.
A prepayment will apply at PO. NCNR (non-cancelable, non-returnable.)

WARNING: Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit solais.com/dimming for up-to-date dimmer compatibility information.

NOTES: This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved.

Information subject to change without notice.

