

INDL


FIELD SELECTABLE GENERAL PURPOSE LINEARS

PROJECT _____

TYPE _____

SPECIFICATION _____

- Easy installation in new construction or retrofit applications
- Uniform illumination with no visible LEDs
- Round diffuse lens provides smooth illumination for visual comfort and minimal glare
- Produces continuous runs with minimum interruption
- 0-10 V dimming standard
- Field Selectable 3500K, 4000K, 5000K color temperatures and lumen outputs
- Steel housing and PMMA lens
- 120-277 V; 50-60 Hz
- 120,000 Hours (L70)
- RoHS-compliant
- Power factor > 0.90
- Total harmonic distortion < 20%
- UL Certified for dry and damp locations
- Meets IEEE 1789-2015 Low Risk flicker category
- Meets IEEE C.62.41 1991, Class A input transient surge protection (2.5kV)
- DLC Premium Listed
- 5-year warranty

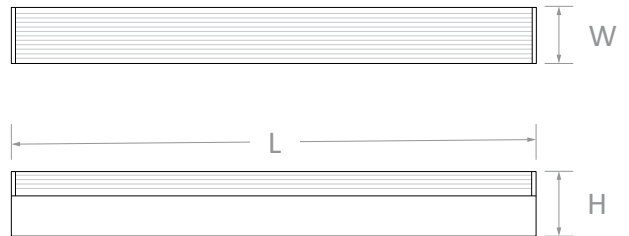

Fixture	Nominal Length (L)	Nominal Width (W)	Nominal Height (H)	Weight (lbs.)	Wattage (W)	Lumens
4 ft.	47 3/8"	2 3/8"	2 3/4"	3.7	35	4300
8 ft.	94 1/4"	2 3/8"	2 3/4"	7.5	65	8100

Ordering Information Example: INDL/4/835/4300/R/PW/UNV/EM

Fixture	Length	CRI	CCT	Delivered Lumens	Diffuser	Finish Color	Driver	Options + Accessories* (MAX 2)
INDL	4 - 4 ft. 8 - 8 ft.	8 - 80+	FS - Field Selectable	FSS - Field Selectable	R - Round	PW - White	UNV - Universal input; 0-10V dimming to 10%	n/a - leave blank for standard 40H (4000K, high output) EM - Remote mount emergency battery backup (90 minute, 11 W, 1600 lumens, CEC listed) OS - Passive infrared occupancy sensor 35L - 3500K, low output 35M - 3500K, mid output 35H - 3500K, high output 40L - 4000K, low output 40M - 4000K, high output 50L - 5000K, low output 50M - 5000K, mid output 50H - 5000K, high output

* Contact factory for availability and lead time for custom, preselected options; Standard fixture is preset to 4000K/40H (80+ CRI, 4000K, high output)

INDL

FIELD SELECTABLE GENERAL PURPOSE LINEARS

PROJECT _____

TYPE _____


SPECIFICATION _____

▪ PHOTOMETRY: 80+ CRI, 3500K

4 ft., 4300 Lumen

Total Lumens	4,293
Input Wattage	33 W
Efficacy	129 lm/W
Spacing Criterion	
0 - 180°	1.22
90 - 270°	1.30

Zone	Lumens	% Fixture	Zone	Lumens	% Fixture
0-20°	448	10.4%	60-80°	869	20.2%
0-30°	949	22.1%	70-80°	371	8.6%
0-40°	1,554	36.2%	80-90°	245	5.7%
0-60°	2,782	64.8%	90-110°	255	5.9%
0-80°	3,651	85.0%	90-120°	316	7.4%
0-90°	3,895	90.7%	90-130°	352	8.2%
10-90°	3,779	88.0%	90-150°	386	9.0%
20-40°	1,106	25.8%	90-180°	398	9.3%
20-50°	1,740	40.5%	110-180°	142	3.3%
40-70°	1,726	40.2%	0-180°	4,293	100.0%

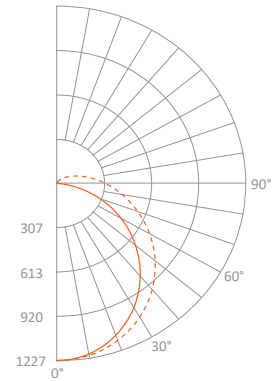

WARNING: Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit solais.com for dimmer compatibility information.

NOTES: This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved.