

# LR38 VNSP


## 4° SPECIALTY SPOT

### PAR38 | RETROFIT LAMP

- 120 V
- 50,000 Hours (L70)
- Halogen PAR form factor (ANSI compliant)
- Halogen PAR38 Aperture (MOL: 5 3/8")
- Lightest LED lamps on the market
- RoHs-compliant
- Dry location rating
- ETL Certified to UL Standard 1993
- Contain no lead or mercury
- Fully dimmable; Compatability list available.
- Base Types: E26 Standard; GU24\*
- Recommended for use in open environment fixtures
- Approved for use in recessed IC and non-IC rated fixtures with open apertures only
- Highest center beam candle power (**105,000 CBCP**) LED lamp on market
- Narrowest beam spread of any replacement LED lamp on the market.



Weight: 9.6 oz.

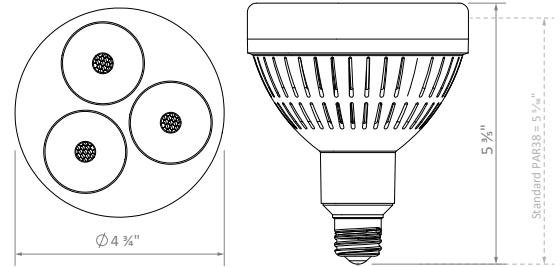

NOTE: This product has a MOL ≠ standard PAR38  
Please verify fit prior to ordering



#### Ordering Information

Example: LR38/04/30K/400/BK

Lamp	Beam Spread	CCT	Lumens	Housing Color
LR38	04	30K	400	BK - Black

Lamp	Product Code			Power (Watts)	CBCP (cd)	Standard CRI
	Beam Angle	CCT	Delivered Lumens			
LR38 VNSP	4	30K	400	9.5	105000	83



Luxiance utilizes active cooling to remove heat from the LED system - allowing Solais LED lamps to operate cooler, resulting in superior life, light output, and performance.

\*Consult factory for lead time and availability



Thermal Throttle – In the event that Solais products begin to overheat, they will undetectably dim themselves to protect your technology investments.

**WARNING:** Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit [solais.com/dimming](http://solais.com/dimming) for up-to-date dimmer compatibility information.

**NOTES:** This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**