

PROJECT _____ TYPE _____

SPECIFIER _____ MEMO _____

ORDERING CODE BREAKDOWN

MAIN FEATURES


- Recommended for use in open environment fixtures; Approved for use in recessed IC and non-IC rated fixtures with open apertures only
- 120V; Fully dimmable
- Base Types: E26 Standard; GU24*
- Halogen PAR form factor (ANSI compliant)
- Lightest LED lamps on the market
- Delivering up to 2400 lumens at 26W
- Custom internal driver meets IEEE 1789-2015 Low Risk flicker category across dimming range
 - VioLight color rendering enhancements available
- 90+ High CRI available for 27K and 30K. Consult factory for availability in other color temperatures
- RoHs-compliant, Dry location rating; ETL Certified to UL Standard 1993
- 5-year Warranty; 50,000 hours (L70)



FIXTURE	BEAM SPREAD	CCT	CRI	LUMENS	FINISH
LR38 : Active PAR38 lamp	15 : 15°	27 : 2700K	K : 80CRI	1600 : 17W, 120V	WH : White (RAL9010)
	25 : 25°	30 : 3000K	v : VioLight	1850 : 20W, 120V	BK : Black (RAL9005)
	40 : 40°	35 : 3500K	h : 90+ CRI	2400 : 26W, 120V	SL : Silver (RAL7001)
		40 : 4000K			

*Consult factory for lead time and availability

Note: VioLight and High CRI products will produce up to 20% less measured lumens than their standard CCT equivalent; Although, perceived lumens will be noticeably higher than their standard counterparts.

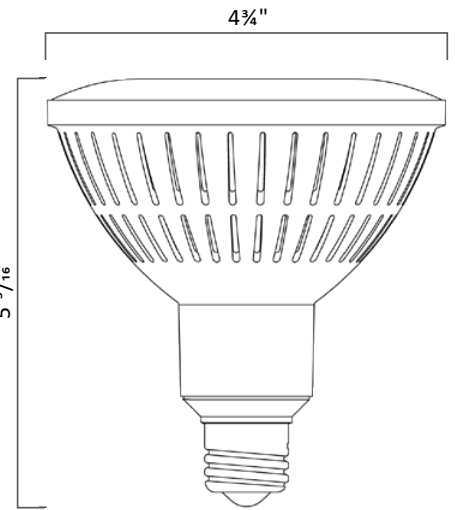

Weight: 9.4 oz.

Lamp	Product Code			Power (Watts)	CBCP (cd)	Standard CRI
	Beam Angle	CCT	Delivered Lumens			
LR38	15	27K	1600	17	13100	83
	25				8150	
	40				3200	
	15	30K			13100	
	25				8150	
	40				3200	
	15	27K	2400	26	19650	85
	25				12350	
	40				4800	
	15	30K			19650	
	25				12350	
	40				4800	
15	30v	1850	22	15140	85	
25				9420		
40				3700		

WARNING: Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit solais.com/dimming for up-to-date dimmer compatibility information.

NOTES: This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**



Thermal Throttle – In the event that Solais products begin to overheat, they will undetectably dim themselves to protect your technology investments.



VioLight radiates superior quality, enhancing colors in merchandise, making colors more vibrant and offering a truly competitive LED replacement for CMH-like crispness.



Luxiance utilizes active cooling to remove heat from the LED system - allowing Solais LED lamps to operate cooler, resulting in superior life, light output, and performance.