

PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_

SPECIFIER \_\_\_\_\_ MEMO \_\_\_\_\_

ORDERING CODE BREAKDOWN

## MEDIUM DROPLIT POWERED BY LUCIE 3" CANOPY MOUNT PENDANT

### MAIN FEATURES

- 95 CRI Standard; 98+ CRI option available
- Modular platform with integrated driver provides easy maintenance for individual components above and below the ceiling
- Solais' proprietary driver technology delivers smooth, flicker-free dimming (per IEEE 1789-2015) to 1% via phase-cut or 0-10V
- Custom TIR optic platform to ensure smooth beams and excellent light control with no need for a solite lens
- Accommodates up to two accessories, plus snoot



Perfect White, Silver + SN, Black + AS



FIXTURE	BEAM SPREAD	CRI	CCT	LUMENS	FINISH	CABLE + CANOPY	CABLE + CANOPY FINISH	POWER SUPPLY	MODULE OPTIONS	FIELD OPTIONS
MDR	NSP : 15°	9 : 95 CRI	22 : 2200K	1000 : 10W	PW : Perfect White	CM1 : Discreet Canopy; 10' cable	PW : Perfect White Canopy and Cable	120P : 120V, 1% phase-cut dimming	AS : Acrylic Snoot	CASPC : Casambi Wireless Phase-cut Node
	NFL : 23°	H : 98+ CRI	25 : 2500K	1500 : 16W	BK : Black	CM2 : Discreet Canopy; 20' cable	BK : Black Canopy and Cable	UNV3 : 120-277V, 1% Phase-cut/ 0-10V dimming	SN : Snoot	CAS10 : Casambi Wireless 0-10V Node
	FL : 36°	D : Dim-to-Warm	27 : 2700K	2000 : 22W	SV : Silver	TCM1 : Tall Canopy; 10' cable		UNV2 : 120-277V, 1% Phase-cut/ 0-10V dimming	HL : Honeycomb Louver	
	WFL : 60°		30 : 3000K	2300 : 24W	BG : Brushed Gold	TCM2 : Tall Canopy; 20' cable		UNV4 : 120-277V, 0.1% DALI-2 D4i DT6/DT8	LS : Linear Spread Lens	
			35 : 3500K		BA : Brushed Aluminum				SS : Solite Spread Lens	
			40 : 4000K		CR : Chrome					
			50 : 5000K		BZ : Bronze					
					BC : Black Chrome					
					RC : Rose Gold Chrome					
					GD : Gold					
					GC : Gold Chrome					

Notes: Dim to Warm is 98+ CRI, 1000 lumens only. Unavailable with NSP. 2200K, 2500K, and NSP are only available with '9' and are 90+ CRI. Consult factory for mixing and matching finishes of fixtures and/or snoots

PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

## MEDIUM DROPLIT POWERED BY LUCIE 3" CANOPY MOUNT PENDANT

### OPTICS + PERFORMANCE

- 4 custom beam spreads available
  - Narrow Spot - 15°
  - Narrow Flood - 23°
  - Flood - 36°
  - Wide Flood - 60°
- 4 performance packages
  - 10W; 1000 lumens
  - 16W; 1500 lumens
  - 22W; 2000 lumens
  - 24W; 2300 lumens
- Color Temperatures
  - 95 and 98+ CRI: 2200K, 2500K, 2700K, 3000K, 3500K, 4000K, 5000K
  - Dim to Warm: 3000K to 1800K
- Fixture life:
  - Full power: 50,000 hours
  - 75% power: 100,000 hours
  - Below 50% power: 125,000 hours
  - LED 90% lumen maintenance (LM90): 60,000 hours

### ELECTRICAL + CONTROLS

- 120V: <1% Phase-cut dimming (*discreet canopy*)
- 120-277V: <1% Phase-cut or 0-10V dimming (*tall canopy*)

### CONSTRUCTION + FINISH

- Weight: 1.6 lbs.
- Die-cast aluminum alloy housing for optimal thermal performance
- Field-cutable cable; 10' provided standard
- Standard finishes (*consult factory for custom*):
  - White: RAL 9003
  - Black: RAL 9005
  - Silver: RAL 7001
- Solais Signature Series finishes also available


### RATINGS + CERTIFICATIONS

- Meets California Title 24 + JA8
- IP20 and IK08 rated
- UL listed for dry and damp locations (*E485648*)
- Contain no lead or mercury

### WARRANTY

- 5-year warranty

### DIMENSIONAL DETAILS

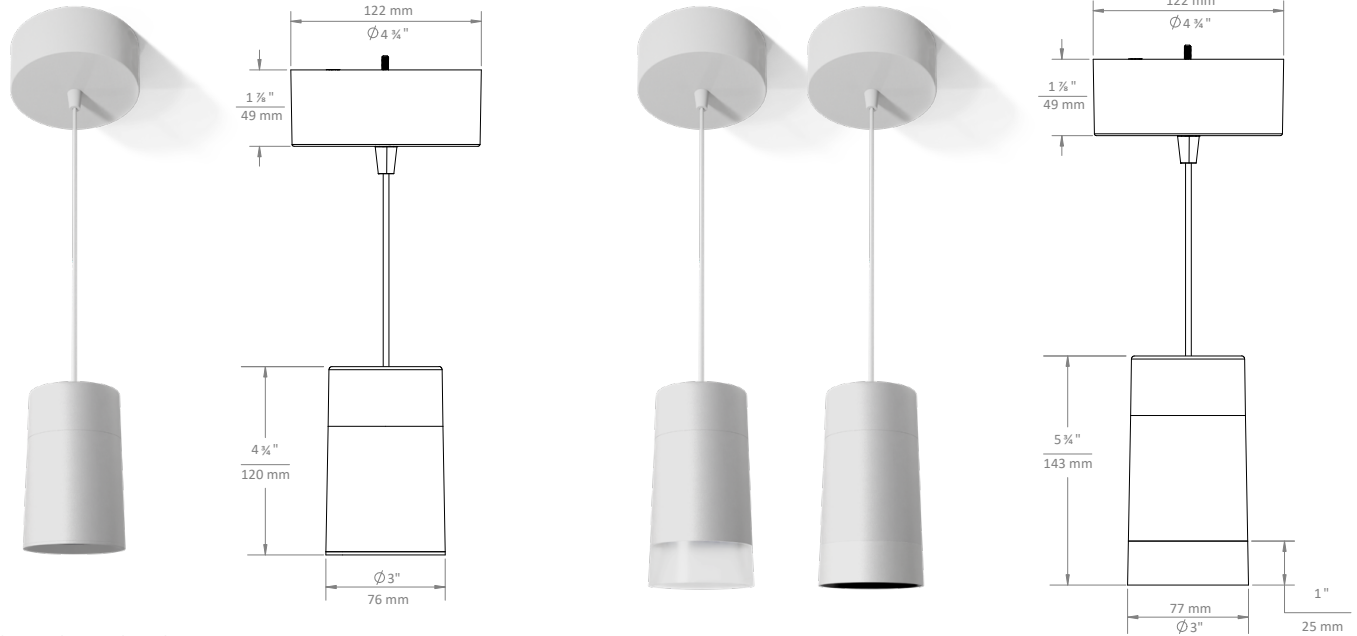

▪ With Snoot Acrylic Snoot (AS) and Matching Snoot (SN)

### SIGNATURE SERIES FINISHES

(shown with matching snoots)

