

## SCATTO | BENDS

48V TRACK SYSTEM  
CURVED STANDARD SURFACE MOUNT

### MAIN FEATURES

- Designed for surface mount and suspension mounted applications
- Designed for linear luminaires to extend past the track and trackhead adapters to sit flush
- Field-cuttable for custom lengths and even more versatility
- Great for use in architectural and high-end applications



### Ordering Information



**Scatto Type**  
SC31-ST - Surface Mount

**Length/Radius**  
350-BEND - 350mm  
500-BEND - 500mm  
CST-BEND - Contact us to order custom bends for your Scatto project!

**Finish**  
BK - Black



**Finish**  
BK - Black

### SC31 Connectors

SC31-UM-EFR - End feed, Right Polarity  
SC31-UM-EFL - End feed, Left Polarity  
SC31-UM-SJC - Straight Joining Connector  
SC31-UM-SIC - Straight Isolating Connector  
SC31-UM-LFI - 'L' live feed, Inner Polarity  
SC31-UM-LFO - 'L' live feed, Outer Polarity  
SC31-UM-TOL - 'T' live feed, Outer/Left Polarity  
SC31-UM-TOR - 'T' live feed, Outer/Right Polarity  
SC31-UM-TIL - 'T' live feed, Inner/Left Polarity  
SC31-UM-TIR - 'T' live feed, Inner/Right Polarity  
SC31-UM-XFC - 'X' live feed  
SC31-UM-ACR - Adjustable Connector



**Finish**  
BK - Black

### SC31-SM Accessories

SC-SX-ECC - End Cap  
SC-SX-ECF - End Cap, feedable  
SC-UM-TCT - Conductor Cutting Tool

### RATINGS + CERTIFICATIONS

- UL Certified for dry locations
- RoHS-compliant
- Designed for use with Solais® Scatto™ fixtures and components

### ELECTRICAL + SAFETY

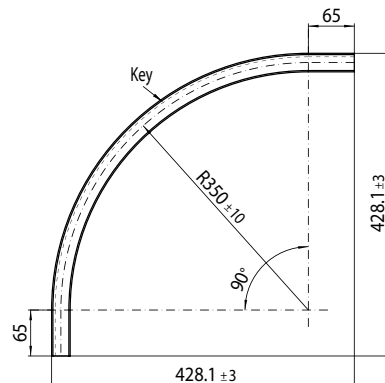
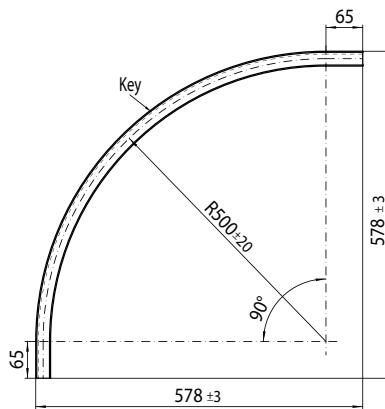

- 48V, +/- 2A
- 96W maximum load





























### CONSTRUCTION + FINISH

- Extruded aluminum construction standard finish in black (RAL 9005)
- Insulated extruded body in PVC
- Solid copper conductors
- Full circles are possible. Consult factory to discuss.

### WARRANTY

- 3-year warranty



Accessories			Scatto Connector		
<b>SC-SX-ECC</b> End Cap <i>end cap, closed;</i> <i>Compatible with SCST and SCSM</i>			<b>SC31-UM-LFI</b> 'L' live feed, Inner Polarity <i>Polycarbonate body,</i> <i>copper alloy contacts</i>		
<b>SC-SX-ECF</b> End Cap <i>end cap, feedable</i> <i>Compatible with SCST and SCSM</i>			<b>SC31-UM-LFO</b> 'L' live feed, Outer Polarity <i>Polycarbonate body,</i> <i>copper alloy contacts</i>		
<b>SC-SX-TCV</b> Aesthetic Track Cover <i>PMMA; Field cuttable,</i> <i>118 3/4"   3000 mm</i> <i>Compatible with SCST, SCRT, SCSH,</i> <i>SCRF, and SCSM</i>			<b>SC31-UM-TOL</b> 'T' live feed, Outer/Left Polarity <i>Polycarbonate body, copper alloy</i> <i>contacts, 2 PMMA covers</i>		
			<b>SC31-UM-TOR</b> 'T' live feed, Outer/Right Polarity <i>Polycarbonate body, copper alloy</i> <i>contacts, 2 PMMA covers</i>		
			<b>SC31-UM-TIL</b> 'T' live feed, Inner/Left Polarity <i>Polycarbonate body, copper alloy</i> <i>contacts, 2 PMMA covers</i>		
			<b>SC31-UM-TIR</b> 'T' live feed, Inner/Right Polarity <i>Polycarbonate body, copper alloy</i> <i>contacts, 2 PMMA covers</i>		
<b>SC31-UM-EFL</b> End feed, Left Polarity <i>Polycarbonate body,</i> <i>copper alloy contacts</i>			<b>SC31-UM-XFC</b> 'X' live feed <i>Polycarbonate body, copper alloy</i> <i>contacts, 3 PMMA covers</i>		
<b>SC31-UM-EFR</b> End feed, Right Polarity <i>Polycarbonate body,</i> <i>copper alloy contacts</i>			<b>SC31-UM-ACR</b> Adjustable Connector <i>Polycarbonate body,</i> <i>copper alloy contacts</i>		
<b>SC31-UM-SJC</b> Straight Joining Connector <i>Polycarbonate body,</i> <i>copper alloy contacts</i>					
<b>SC31-UM-SIC</b> Joining Insulating Connector, Mechanical <i>Polycarbonate body</i>	