

SCL Rotating

SCATTO 48 V TRACK SYSTEM UPLIGHTING | DOWNLIGHTING

- 48 V low voltage; designed for use with Solais® Scatto™ system
- Aluminum body with polycarbonate optics; Polyamide end caps
- Vertical and horizontal shifting plus full rotational linear
- 50,000 hours (L90)
- 0-10 V dimming to 1%
- UL and CE Listed for dry locations
- Toolless 'click in' and 'click out' mechanical installation
- 3 year warranty




Ordering Information

Example: SCL2/3/R/FD/930/BK

Fixture	Voltage	Type	Optic	CRI + CCT	Finish Color
SCL1	3 - 48 V	R - Rotating	FD - Frosted Diffuser	930 - 90+ CRI, 3000K 940 - 90+ CRI, 4000K	BK - Black

Fixture	Length	Weight (lbs)	Optic	Output Beam	Power (W)	Delivered Lumens	CBCP (candela)
SCL1	12 1/4" — 310 mm	0.4	Frosted Diffuser	101°	6.1	546	121
SCL2	23 1/4" — 590 mm	0.9	Frosted Diffuser	101°	11.9	1091	241

SCL1 | 1 foot

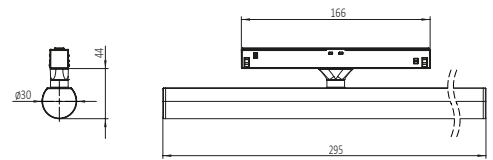

SCL2 | 2 foot

