

PROJECT

SPECIFIER

SPECIFICATION

TYPE

MAIN FEATURES

- Designed for surface mount or hanging suspension applications
- Designed for linear luminaires to sit flush and trackhead adapters to recess into the track. (SC2 mounting required)
- Great for use in architectural and high-end applications
- Field-cuttable for custom lengths

RATINGS + CERTIFICATIONS

- UL Certified for dry locations
- RoHS-compliant
- Designed for use with Solais® Scatto™ fixtures and components

ELECTRICAL + SAFETY

- 48V, +/- 2A
- 96W maximum load

CONSTRUCTION + FINISH

- Extruded aluminum construction standard finish in black (RAL 9005)
- Insulated extruded body in PVC
- Solid copper conductors

WARRANTY

- 3-year warranty




Ordering Information



Finish
BK - Black

Scatto Type + Length

- SC31-LH-4 - 4ft. Suspension/Surface Long 'H' Shape
- SC31-LH-8 - 8ft. Suspension/Surface Long 'H' Shape



Finish
BK - Black

SC31 Accessories


- SC-UM-TCV - Track Cover
- SC-LX-ECC - End Cap
- SC-LX-ECF - Feedable End Cap
- SC-UM-TCT - Conductor Cutting Tool



Finish
BK - Black

SC31 Connectors




- SC31-UM-EFR - End feed, Right Polarity
- SC31-UM-EFL - End feed, Left Polarity
- SC31-UM-SJC - Straight Joining Connector
- SC31-UM-SIC - Straight Insulating Connector
- SC31-UM-LFI - 'L' live feed, Inner Polarity
- SC31-UM-LFO - 'L' live feed, Outer Polarity
- SC31-UM-TOL - 'T' live feed, Outer/Left Polarity
- SC31-UM-TOR - 'T' live feed, Outer/Right Polarity
- SC31-UM-TIL - 'T' live feed, Inner/Left Polarity
- SC31-UM-TIR - 'T' live feed, Inner/Right Polarity
- SC31-UM-XFC - 'X' live feed
- SC31-UM-ACR - Adjustable Connector



Finish
BK - Black

Scatto Suspension

- SC-UM-TCC - Ceiling Clamp
- SC-UM-LJB - Long Joining Bracket
- SC-UM-LSB - 'L' Suspension Bracket
- SC-UM-LMB - 'L' Mechanical Bracket
- SC-UM-TMB - 'T' Mechanical Bracket
- SC-UM-XMB - 'X' Mechanical Bracket
- SS-UM-SEG - Side Exit Gripper
- SS-UM-SMC - Surface Mount Cable Coupler
- SS-UM-DLG - Double Looping-Gripper
- SS-UM-ACB - Barrel End Aircraft Cable, 20 ft.
- SS-UM-ACL - Loop End Aircraft Cable, 20 ft.
- SS-UM-CPC - Ceiling Cup with Ceiling Bracket

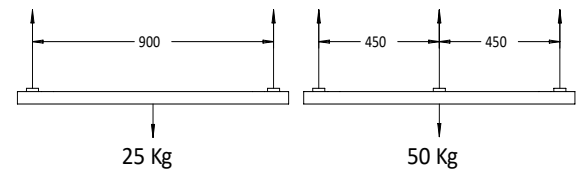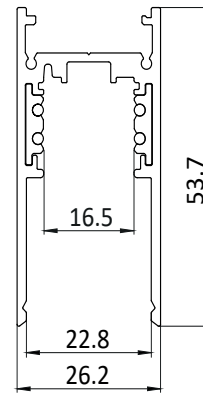

PROJECT

SPECIFIER

SPECIFICATION

TYPE

Accessories		
SC-UM-TCV Aesthetic Track Cover PMMA; Field cuttable, 118 1/2" 3000 mm		
SC-LX-ECC End Cap Polycarbonate body		
SC-LX-ECF Feedable End Cap Polycarbonate body		
SC-LH-LMB 'L' Mechanical Bracket Polycarbonate body		
SC-LH-TMB 'T' Mechanical Bracket Polycarbonate body		
SC-LH-XMB 'X' Mechanical Bracket Polycarbonate body		

Scatto Connector		
SC31-UM-SJC Straight Joining Connector Polycarbonate body, copper alloy contacts		
SC31-UM-SIC Joining Isolating Connector, Mechanical Polycarbonate body		
SC31-UM-LFI 'L' live feed, Inner Polarity Polycarbonate body, copper alloy contacts		
SC31-UM-LFO 'L' live feed, Outer Polarity Polycarbonate body, copper alloy contacts		
SC31-UM-TOL 'T' live feed, Outer/Left Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
SC31-UM-TOR 'T' live feed, Outer/Right Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
SC31-UM-TIL 'T' live feed, Inner/Left Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
SC31-UM-TIR 'T' live feed, Inner/Right Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
SC31-UM-XFC 'X' live feed Polycarbonate body, copper alloy contacts, 3 PMMA covers		
SC31-UM-ACR Adjustable Connector Polycarbonate body, copper alloy contacts		

Scatto Connector		
SC31-UM-EFL End feed, Left Polarity Polycarbonate body, copper alloy contacts		
SC31-UM-EFR End feed, Right Polarity Polycarbonate body, copper alloy contacts		

Scatto Suspension		
<p>SC-UM-TCC Ceiling Clamp Steel; Recommended for use with SS-U-SEG</p>		
<p>SC-UM-LJB Long Joining Bracket Steel; For aircraft Cable Suspension; Recommended for use with SS-U-SEG</p>		
<p>SC-UM-LSB 'L' Suspension Bracket Steel; For aircraft Cable Suspension; Recommended for use with SS-U-SEG</p>		
<p>SS-UM-CPC Ceiling Cup with ceiling bracket and screw gripper for use with cable suspension</p>		

Track Suspension Accessories		
<p>SS-UM-TSC</p>	<p>T-bar Seismic Suspension Clamp For use where local code requires direct connection to the ceiling. Ceiling-supported clip for 15/16" T-bar</p>	
<p>SS-UM-ACL</p>	<p>Aircraft Cable with Loop 20 feet of 1/16" galvanized cable. Recommended for use with SS-UM-SEG.</p>	
<p>SS-UM-ACB</p>	<p>Aircraft Cable with Barrel 20 feet of 1/16" galvanized cable. Recommended for use with SS-UM-SEG.</p>	
<p>SS-UM-SEG</p>	<p>Side Cable Exit Gripper For use with 3/64" or 1/16" threaded cable only. Recommended for use with SS-UM-ACL or SS-UM-ACB.</p>	
<p>SS-UM-SMC</p>	<p>Surface Mount Cable Coupler 2-part non-adjustable cable coupler Recommended for use with SS-UM-ACB.</p>	
<p>SS-UM-DLG</p>	<p>Double Mechanism Looping Gripper Double-ended gripper with double side cable exits for use with 3/64" or 1/16" threaded cable only.</p>	

