

PROJECT

SPECIFIER

SPECIFICATION

TYPE

MAIN FEATURES

- Designed for surface mount or hanging suspension applications
- Designed for linear luminaires to extend past the track and trackhead adapters to sit flush
- Great for use in architectural and high-end applications
- Field-cuttable for custom lengths

RATINGS + CERTIFICATIONS

- UL Certified for dry locations
- RoHs-compliant
- Designed for use with Solais® Scatto™ fixtures and components

ELECTRICAL + SAFETY

- 48V, +/- 2A
- 96W maximum load

CONSTRUCTION + FINISH

- Extruded aluminum construction standard finish in black (RAL 9005)
- Insulated extruded body in PVC
- Solid copper conductors

WARRANTY

- 3-year warranty



Ordering Information



Scatto Type + Length

- SC31-SH-4 - 4ft. Short Suspension
- SC31-SH-8 - 8ft. Short Suspension



SC31 Accessories

- SC-UM-TCV - Track Cover
- SC-SH-ECC - End Cap
- SC-SH-ECF - Feedable End Cap
- SC-UM-TCT - Conductor Cutting Tool






SC31 Connectors

- SC31-UM-EFR - End feed, Right Polarity
- SC31-UM-EFL - End feed, Left Polarity
- SC31-UM-SJC - Straight Joining Connector
- SC31-UM-SIC - Straight Insulating Connector
- SC31-UM-LFI - 'L' live feed, Inner Polarity
- SC31-UM-LFO - 'L' live feed, Outer Polarity
- SC31-UM-TOL - 'T' live feed, Outer/Left Polarity
- SC31-UM-TOR - 'T' live feed, Outer/Right Polarity
- SC31-UM-TIL - 'T' live feed, Inner/Left Polarity
- SC31-UM-TIR - 'T' live feed, Inner/Right Polarity
- SC31-UM-XFC - 'X' live feed
- SC31-UM-ACR - Adjustable Connector



Scatto Suspension

- SC-UM-TCC - Ceiling Clamp
- SC-UM-LJB - Long Joining Bracket
- SC-UM-LSB - 'L' Suspension Bracket
- SS-UM-SEG - Side Exit Gripper
- SS-UM-SMC - Surface Mount Cable Coupler
- SS-UM-DLG - Double Looping-Gripper
- SS-UM-ACB - Barrel End Aircraft Cable, 20 ft.
- SS-UM-ACL - Loop End Aircraft Cable, 20 ft.
- SS-UM-CPC - Ceiling Cup with Ceiling Bracket

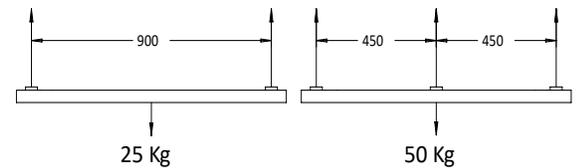

PROJECT _____

SPECIFIER _____

SPECIFICATION _____

TYPE _____


Accessories		
SC-UM-TCV Aesthetic Track Cover PMMA; Field cuttable, 118 1/2" 3000 mm		
SC-SH-ECC End Cap Polycarbonate body		
SC-SH-ECF Feedable End Cap Polycarbonate body		

Scatto Connector		
SC31-UM-LFI 'L' live feed, Inner Polarity Polycarbonate body, copper alloy contacts		
SC31-UM-LFO 'L' live feed, Outer Polarity Polycarbonate body, copper alloy contacts		
SC31-UM-TOL 'T' live feed, Outer/Left Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
SC31-UM-TOR 'T' live feed, Outer/Right Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
SC31-UM-TIL 'T' live feed, Inner/Left Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
SC31-UM-TIR 'T' live feed, Inner/Right Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
SC31-UM-XFC 'X' live feed Polycarbonate body, copper alloy contacts, 3 PMMA covers		
SC31-UM-ACR Adjustable Connector Polycarbonate body, copper alloy contacts		

Scatto Connector		
SC31-UM-EFL End feed, Left Polarity Polycarbonate body, copper alloy contacts		
SC31-UM-EFR End feed, Right Polarity Polycarbonate body, copper alloy contacts		
SC31-UM-SJC Straight Joining Connector Polycarbonate body, copper alloy contacts		
SC31-UM-SIC Joining Insulating Connector, Mechanical Polycarbonate body		



PROJECT	SPECIFIER
SPECIFICATION	TYPE

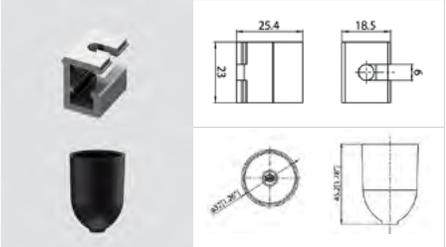Scatto Suspension	
SS-UM-TCC Ceiling Clamp <i>Steel; Recommended for use with SS-U-SEG</i>	
SS-UM-LJB Long Joining Bracket <i>Steel; For aircraft Cable Suspension; Recommended for use with SS-U-SEG</i>	
SS-UM-LSB 'L' Suspension Bracket <i>Steel; For aircraft Cable Suspension; Recommended for use with SS-U-SEG</i>	
SS-UM-CPC Ceiling Cup <i>with ceiling bracket and screw gripper for use with cable suspension</i>	

Track Suspension Accessories		
SS-UM-TSC	T-bar Seismic Suspension Clamp <i>For use where local code requires direct connection to the ceiling. Ceiling-supported clip for 15/16" T-bar</i>	
SS-UM-ACL	Aircraft Cable with Loop <i>20 feet of galvanized cable. Recommended for use with SS-UM-SEG.</i>	
SS-UM-ACB	Aircraft Cable with Barrel <i>20 feet of galvanized cable. Recommended for use with SS-UM-SEG.</i>	
SS-UM-SEG	Side Cable Exit Gripper <i>Recommended for use with SS-UM-ACL or SS-UM-ACB.</i>	
SS-UM-SMC	Surface Mount Cable Coupler <i>2-part non-adjustable cable coupler. Recommended for use with SS-UM-ACB.</i>	
SS-UM-DLG	Double Mechanism Looping Gripper <i>Double-ended gripper with double side cable exits.</i>	