

## MAIN FEATURES

- Designed for recessed flangeless applications with millwork
- Designed for linear luminaires to sit flush and trackhead adapters to recess into the track. (SC2 mounting required)
- Great for use in architectural and high-end applications
- Field-cutable for custom lengths

## RATINGS + CERTIFICATIONS

- UL Certified for dry locations
- RoHS-compliant
- Designed for use with Solais® Scatto™ fixtures and components

## ELECTRICAL + SAFETY

- 48V, +/- 2A
- 96W maximum load

## CONSTRUCTION + FINISH

- Extruded aluminum construction standard finish in black (RAL 9005)
- Insulated extruded body in PVC
- Solid copper conductors

## WARRANTY

- 3-year warranty




## Ordering Information



Finish  
BK - Black


**Scatto Track**  
SC31-TM-4 - 4ft. Recessed flangeless, millwork  
SC31-TM-8 - 8ft. Recessed flangeless, millwork



Finish  
BK - Black

## SC31-TM Accessories



SC-UM-TCV - Track Cover  
SC-LX-ECC - End Cap  
SC-LX-ECF - End Cap, feedable  
SC-TM-HMC - Horizontal Mechanical Corner Joint  
SC-TM-EMC - External Vertical Mechanical Corner Joint  
SC-TM-IMC - Internal Vertical Mechanical Corner Joint  
SC-UM-SRB - Straight Reinforcing Bracket  
SC-UM-TCT - Conductor Cutting Tool



































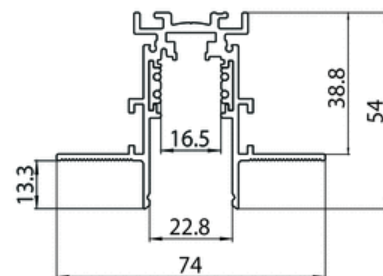





Finish  
BK - Black

## SC31 Connectors

SC31-UM-EFR - End feed, Right Polarity  
SC31-UM-EFL - End feed, Left Polarity  
SC31-UM-SJC - Straight Joining Connector  
SC31-UM-SIC - Straight Insulating Connector  
SC31-UM-LFI - 'L' live feed, Inner Polarity  
SC31-UM-LFO - 'L' live feed, Outer Polarity  
SC31-UM-TOL - 'T' live feed, Outer/Left Polarity  
SC31-UM-TOR - 'T' live feed, Outer/Right Polarity  
SC31-UM-TIL - 'T' live feed, Inner/Left Polarity  
SC31-UM-TIR - 'T' live feed, Inner/Right Polarity  
SC31-UM-XFC - 'X' live feed  
SC31-UM-ACR - Adjustable Connector



Accessories			Scatto Connector		
<b>SC-UM-TCV</b> Aesthetic Track Cover PMMA; Field cuttable, 118 1/2"   3000 mm			<b>SC31-UM-EFL</b> End feed, Left Polarity Polycarbonate body, copper alloy contacts		
<b>SC-LX-ECC</b> End Cap Metal end cap; Compatible with SCLT, SCLH and SCTM			<b>SC31-UM-EFR</b> End feed, Right Polarity Polycarbonate body, copper alloy contacts		
<b>SC-LX-ECF</b> End Cap Metal end cap, feedable Compatible with SCLT, SCLH and SCTM			<b>SC31-UM-SJC</b> Straight Joining Connector Polycarbonate body, copper alloy contacts		
<b>SC-TM-HMC</b> Horizontal Mechanical Corner Joint PMMA;			<b>SC31-UM-SIC</b> Joining Isolating Connector, Mechanical Polycarbonate body		
<b>SC-TM-EMC</b> External Vertical Mechanical Corner Joint PMMA			<b>SC31-UM-LFI</b> 'L' live feed, Inner Polarity Polycarbonate body, copper alloy contacts		
<b>SC-TM-IMC</b> Internal Vertical Mechanical Corner Joint PMMA;			<b>SC31-UM-LFO</b> 'L' live feed, Outer Polarity Polycarbonate body, copper alloy contacts		
<b>SC-TM-IMC</b> Internal Vertical Mechanical Corner Joint PMMA;			<b>SC31-UM-TOL</b> 'T' live feed, Outer/Left Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
<b>SC-UM-SRB</b> Reinforcing Bracket Aluminum joining connector			<b>SC31-UM-TOR</b> 'T' live feed, Outer/Right Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
			<b>SC31-UM-TIL</b> 'T' live feed, Inner/Left Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
			<b>SC31-UM-TIR</b> 'T' live feed, Inner/Right Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
			<b>SC31-UM-XFC</b> 'X' live feed Polycarbonate body, copper alloy contacts, 3 PMMA covers		
			<b>SC31-UM-ACR</b> Adjustable Connector Polycarbonate body, copper alloy contacts	