

SCATTO | SCTM

48V TRACK SYSTEM
LONG RECESSED FLANGELESS | MILLWORK

MAIN FEATURES

- Designed for recessed flangeless applications with millwork
- Designed for linear luminaires to sit flush and trackhead adapters to recess into the track. (SC2 mounting required)
- Great for use in architectural and high-end applications
- Field-cuttable for custom lengths



Ordering Information



Scatto Track
SC31-TM-4 - 4ft. Recessed flangeless, millwork
SC31-TM-8 - 8ft. Recessed flangeless, millwork



SC31-TM Accessories
SC-LX-TCV - Track Cover
SC-LX-ECC - End Cap
SC-LX-ECF - End Cap, feedable
SC-TM-HMC - Horizontal Mechanical Corner Joint
SC-TM-EMC - External Vertical Mechanical Corner Joint
SC-TM-IMC - Internal Vertical Mechanical Corner Joint
SC-UM-SRB - Straight Reinforcing Bracket
SC-UM-TCT - Conductor Cutting Tool



SC31 Connectors
SC31-UM-EFR - End feed, Right Polarity
SC31-UM-EFL - End feed, Left Polarity
SC31-UM-SJC - Straight Joining Connector
SC31-UM-SIC - Straight Insulating Connector
SC31-UM-LFI - 'L' live feed, Inner Polarity
SC31-UM-LFO - 'L' live feed, Outer Polarity
SC31-UM-TOL - 'T' live feed, Outer/Left Polarity
SC31-UM-TOR - 'T' live feed, Outer/Right Polarity
SC31-UM-TIL - 'T' live feed, Inner/Left Polarity
SC31-UM-TIR - 'T' live feed, Inner/Right Polarity
SC31-UM-XFC - 'X' live feed
SC31-UM-ACR - Adjustable Connector

RATINGS + CERTIFICATIONS

- UL Certified for dry locations
- RoHS-compliant
- Designed for use with Solais® Scatto™ fixtures and components

ELECTRICAL + SAFETY



- 48V, +/- 2A
- 96W maximum load

CONSTRUCTION + FINISH

- Extruded aluminum construction standard finish in black (RAL 9005)
- Insulated extruded body in PVC
- Solid copper conductors

WARRANTY

- 3-year warranty

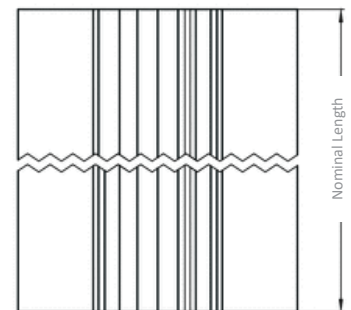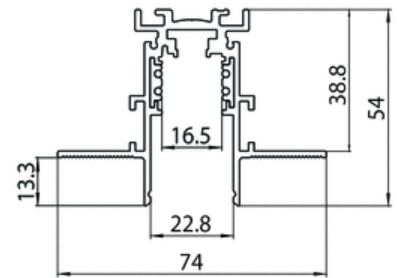

PROJECT

TYPE

Accessories		
SC-LX-TCV Aesthetic Track Cover PMMA; Field cuttable, 118 1/2" 3000 mm		
SC-LX-ECC End Cap Metal end cap; Compatible with SCLT, SCLH and SCTM		
SC-LX-ECF End Cap Metal end cap, feedable Compatible with SCLT, SCLH and SCTM		
SC-TM-HMC Horizontal Mechanical Corner Joint PMMA;		
SC-TM-EMC External Vertical Mechanical Corner Joint PMMA		
SC-TM-IMC Internal Vertical Mechanical Corner Joint PMMA;		
SC-UM-SRB Reinforcing Bracket Aluminum joining connector		

Scatto Connector		
SC31-UM-EFL End feed, Left Polarity Polycarbonate body, copper alloy contacts		
SC31-UM-EFR End feed, Right Polarity Polycarbonate body, copper alloy contacts		
SC31-UM-SJC Straight Joining Connector Polycarbonate body, copper alloy contacts		
SC31-UM-SIC Joining Insulating Connector, Mechanical Polycarbonate body		
SC31-UM-LFI 'L' live feed, Inner Polarity Polycarbonate body, copper alloy contacts		
SC31-UM-LFO 'L' live feed, Outer Polarity Polycarbonate body, copper alloy contacts		
SC31-UM-TOL 'T' live feed, Outer/Left Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
SC31-UM-TOR 'T' live feed, Outer/Right Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
SC31-UM-TIL 'T' live feed, Inner/Left Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
SC31-UM-TIR 'T' live feed, Inner/Right Polarity Polycarbonate body, copper alloy contacts, 2 PMMA covers		
SC31-UM-XFC 'X' live feed Polycarbonate body, copper alloy contacts, 3 PMMA covers		
SC31-UM-ACR Adjustable Connector Polycarbonate body, copper alloy contacts		