

SPECIFICATION

Scatto | SCUD

48V TRACK SYSTEM

DOUBLE EMISSION SUSPENSION

MAIN FEATURES

- Designed for surface mount or hanging suspension applications
- Lower emission designed for linear luminaires to sit flush and trackheads to recess into the track. (SC2 mounting required)
- Upper emission designed for linear luminaires to extend past the track and trackhead adapters to sit flush
- Great for use in architectural and high-end applications
- Field-cuttable for custom lengths

RATINGS + CERTIFICATIONS

- UL Certified for dry locations
- RoHs-compliant
- Designed for use with Solais® Scatto™ fixtures and components

ELECTRICAL + SAFETY

- = 48V, +/- 2A
- 96W maximum load

CONSTRUCTION + FINISH

- Extruded aluminum construction standard finish in black (RAL 9005)
- Insulated extruded body in PVC
- Solid copper conductors

WARRANTY

3-year warranty







Scatto Track

SC31-UD-4 - 4ft. Double emission suspended SC31-UD-8 - 8ft. Double emission suspended

Finish BK - Black

SC31 Connectors

SC31-UM-EFR - End feed, Right Polarity SC31-UM-EFL - End feed, Left Polarity SC31-UM-SJC - Straight Joining Connector SC31-UM-SIC - Straight Insolating Connector SC31-UM-LFI - 'L' live feed, Inner Polarity SC31-UM-LFO - 'L' live feed, Outer Polarity SC31-UM-TOL - 'T' live feed, Outer/Left Polarity SC31-UM-TOR - 'T' live feed, Outer/Right Polarity SC31-UM-TIL - 'T' live feed, Inner/Left Polarity SC31-UM-TIR - 'T' live feed, Inner/Right Polarity

SC31-UM-XFC - 'X' live feed SC31-UM-ACR - Adjustable Connector




SC-UM-TCV - Track Cover SC-UM-SRB - Reinforcing Bracket


Scatto Suspension

SC-UM-TCC - Ceiling Clamp SS-UM-SEG - Side Exit Gripper

SS-UM-SMC - Surface Mount Cable Coupler SS-UM-DLG - Double Looping-Gripper SS-UM-ACB - Barrel End Aircraft Cable, 20 ft. SS-UM-ACL - Loop End Aircraft Cable, 20 ft. SS-UM-CPC - Ceiling Cup with Ceiling Bracket

















PROJECT


SUBMITTED BY

SPECIFICATION

Scatto | SCUD


48V TRACK SYSTEM DOUBLE EMISSION SUSPENSION

Accessories SC-UD-ECC End Cap Metal end cap; Compatible with SCLH and SCUD SC-UM-TCV Aesthetic Track Cover PMMA; Field cuttable, 118 ¾" | 3000 mm Compatible with SCLH, SCTM, SCUD SC-UM-SRB Reinforcing Bracket Aluminum joining connector

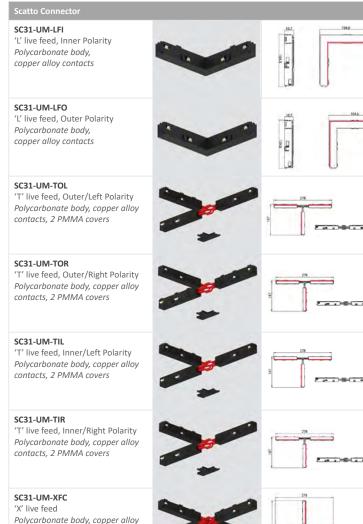

SC31-UM-EFL End feed, Left Polarity Polycarbonate body, copper alloy contacts SC31-UM-EFR End feed, Right Polarity Polycarbonate body, copper alloy contacts SC31-UM-SJC Straight Joining Connector Polycarbonate body, copper alloy contacts SC31-UM-SIC Joining Insolating Connector, Mechanical Polycarbonate body





8655 Corporate Drive

Frisco, TX 75033







contacts, 3 PMMA covers

SC31-UM-ACR Adjustable Connector


Polycarbonate body,

copper alloy contacts



Scatto | SCUD

48V TRACK SYSTEM DOUBLE EMISSION SUSPENSION

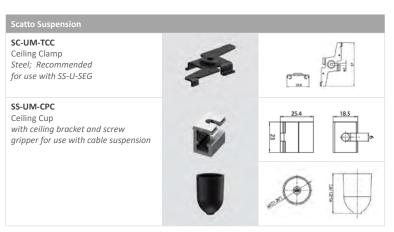

| Track Suspension Accessories | | |
|------------------------------|---|--|
| SS-UM-TSC | T-bar Seismic Suspension Clamp For use where local code requires direct connection to the ceiling. Ceiling-supported clip for 15/16" T-bar | |
| SS-UM-ACL | Aircraft Cable with Loop 20 feet of 1/16" galvanized cable. Recommended for use with SS-UM-SEG. | |
| SS-UM-ACB | Aircraft Cable with Barrel 20 feet of 1/16" galvanized cable. Recommended for use with SS-UM-SEG. | |
| SS-UM-SEG | Side Cable Exit Gripper For use with 3/64" or 1/16" threaded cable only. Recommended for use with SS-UM-ACL or SS-UM-ACB. | |
| SS-UM-SMC | Surface Mount Cable Coupler 2-part non-adjustable cable coupler Recommended for use with SS-UM-ACB. | |
| SS-UM-DLG | Double Mechanism Looping Gripper Double-ended gripper with double side cable exits for use with 3/64" or 1/16" threaded cable only. | |











rev 05/2023