

# WW24



## TRACK MOUNT

### 2-FT | WALL WASH FIXTURE

- Extruded aluminum housing
- LED concealing reflector
- Asymmetrical light distribution for even, top-to-bottom illumination
- 120 V
- 50,000 Hours (L70)
- Integrated driver
- Power on/off switch on adapter
- UL Certified
- RoHS-compliant
- Dry location rating
- Contain no lead or mercury
- Fully dimmable; Compatibility list available.
- Designed for use with track
- J-type, L-type and H-type
- \*NSF Certified fixture optional
- \*MonoWhite color rendering enhancements available
- \*90+ High CRI available for 27K and 30K. Consult factory for availability in other color temperatures. To order, replace 'K' in CCT designation with 'h' in code below.



Weight: 2.7 lb

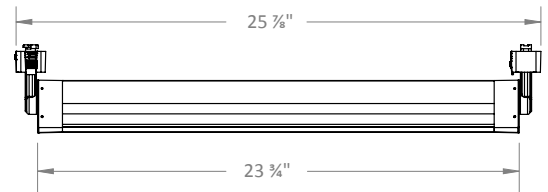

#### Ordering Information

Example: WW24/A/30K/2400/BK/J

Fixture	Beam Spread	CCT / Lumens	Housing Color	Mount Type	Options
WW24	A - Asymmetrical (120° x 100°)	25K / 2500 27K / 3050 30K / 3200 30m* / 3200 35K* / 3200 35m* / 3200 40K* / 3200	WH - White SV - Silver BK - Black	J L H	CB* - Cross-blade Louver NSF* - NSF Certified Fixture
		25K / 2100 27K / 2200 30K / 2400 30m* / 2400 35K* / 2400 35m* / 2400 40K* / 2400			

Fixture	Product Code			Power (Watts)	Standard CRI
	Beam Spread	CCT	Delivered Lumens		
WW24	A (Asymmetrical)	25K	2100	32W	80
			2500	42W	
		27K	2200	32W	
			3050	42W	
		30K	2400	32W	
			3200	42W	
		30m*	2400	32W	90
			3200	42W	
		35K	2400	32W	80
			3200	42W	
		35m*	2400	32W	90
			3200	42W	
40K	2400	32W	80		
	3200	42W			

\*Consult factory for lead time and availability

Note: MonoWhite and High CRI products will produce up to 20% less measured lumens than their standard CCT equivalent; Although, perceived lumens in MonoWhite products will be noticeably higher than their standard counterparts.

**WARNING:** Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit [solais.com](http://solais.com) for dimming for up-to-date dimmer compatibility information.

**NOTES:** This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**