

# SOLAIS

LIGHTING GROUP

Solais Lighting Group (SLG) is a fast-growing, technologically relevant, market-driven manufacturer. We push the innovation envelope to create LED products that replace traditional lighting technologies, with zero compromise to aesthetics and performance.

SLG's products provide quality lighting for its retail, hospitality, supermarket, museum, commercial and utility clients, which include the world's leading brands.

For additional information on Solais Lighting Group's Solais and EnergyLite brands, visit us at [www.solais.com](http://www.solais.com).

SOLAIS<sup>®</sup> + ENERGYLITE

Solais Lighting, LLC | [www.solais.com](http://www.solais.com) | 8655 Corporate Drive, Suite 100, Frisco, TX 75033 | 469.294.1516

# ST2Arm

2-IN ARCHITECTURAL DOWNLIGHT

NO COMPROMISES



CREATED BY SOLAIS<sup>®</sup>



# SOLAIS® introduces **ST2Arm** STRETTA


## PREMIUM LIGHT FOR EVERY BUDGET

In a world full of compromises, the Stretta ST2Arm 2" LED recessed downlight breaks the rules with a premium fixture at an affordable price. Our “no compromise” approach gives you the versatility to create the perfect lighting design for any space.

The Stretta family of fixtures captures your attention with the right combination of features in a sleek, minimalist architectural recessed design. It's elegance in simplicity. With high output from a small aperture, Stretta is the solution for setting the right mood in any space - from restaurants to retail to residential.

## Ratings + Certifications

- IC rated for all configurations
- UL listed for dry and damp locations
- UL listed for wet locations with lensed trim or wall wash trim
- Spray foam rated option
- Chicago Plenum rated option
- Title 24 and JA8 compliant
- Airtight per ASTM E283 option
- Conforms to Washington State Energy Code

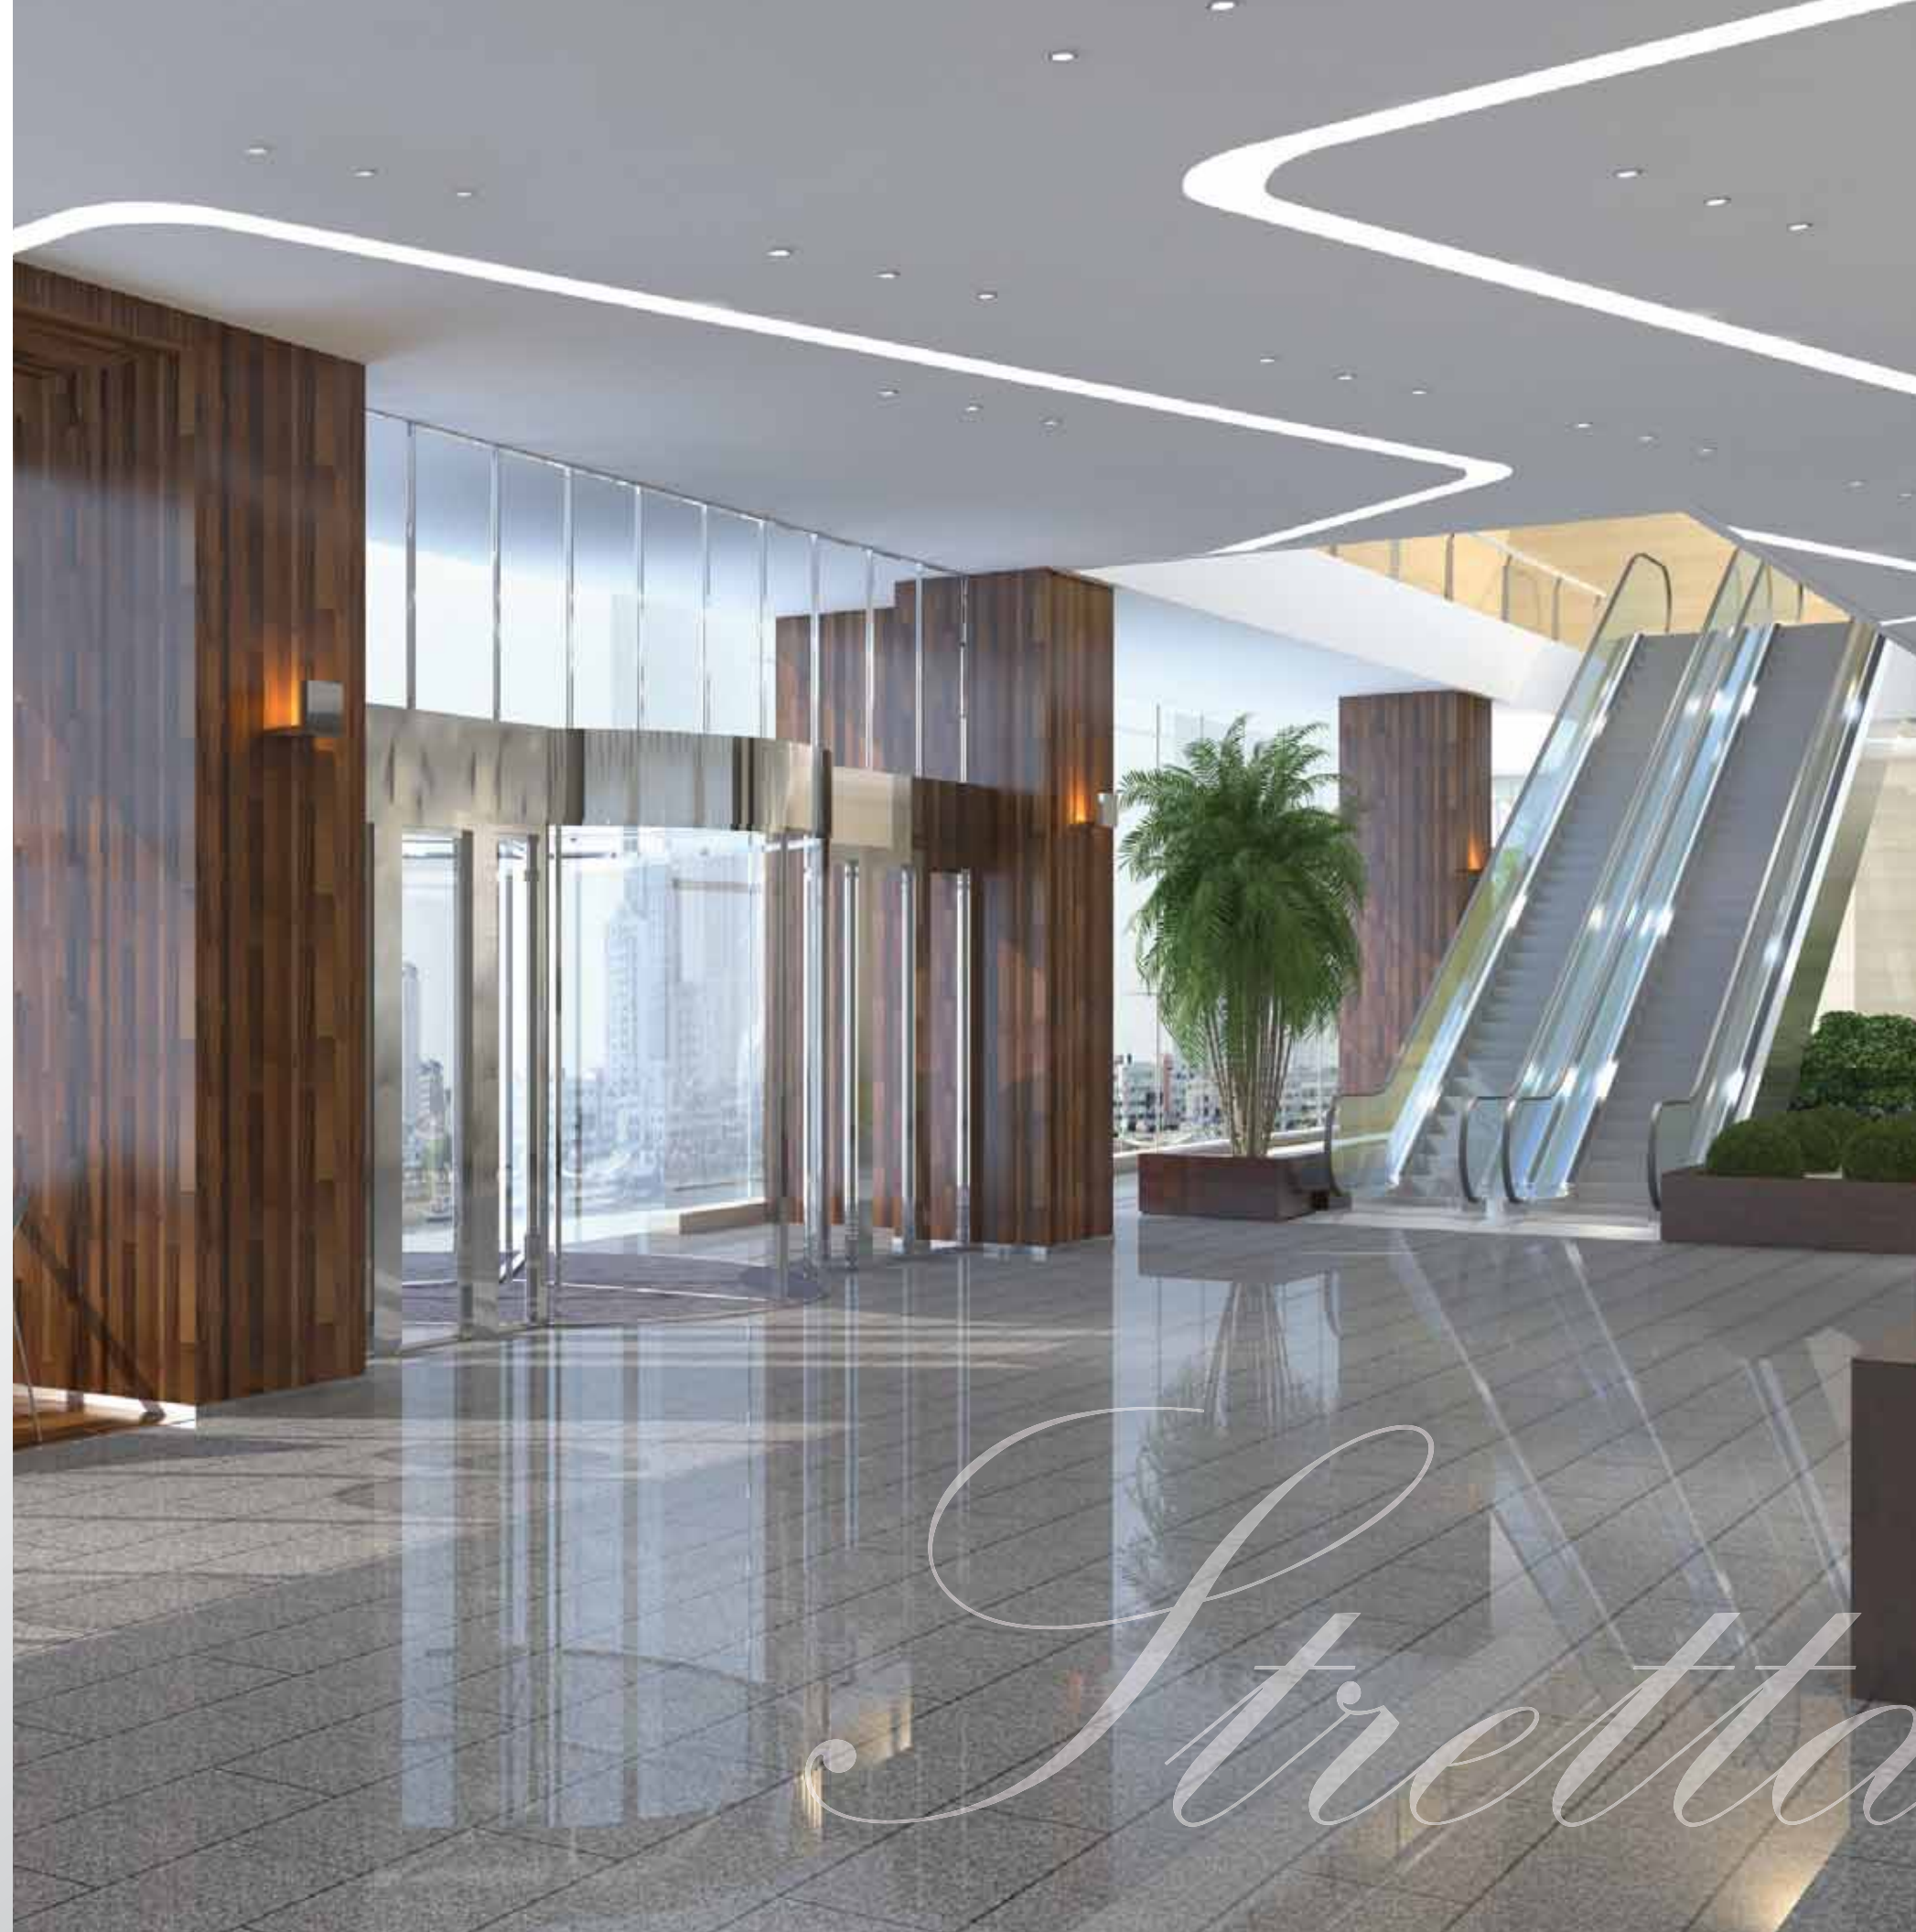





# quality LED lighting with **best-in-class** engineering

## LOW PROFILE INSTALLATION OPTIONS

Inherently airtight and spray-foam rated, the Chicago Plenum housing installs at only 5" height, while the new construction tray and remodel installations are IC rated, at only 4 1/2" in height.



## TOOLLESS POWER SUPPLY

Serviceable from below the ceiling, Solais' proprietary universal 120-277 V input driver provides TRIAC, ELV or 0-10V smooth, flicker-free dimming to 1%.



## OPTIMAL ADJUSTABILITY

Two set-points for vertical adjustability, 40-degree tilt, and 360-degree rotation allows optimal center-beam optics to be maintained through the trim aperture. Module allows for post-installation effortless aiming.



## INDUSTRY-LEADING PERFORMANCE

Delivering up to 900 lumens at 10W in 3000K — and **95 CRI standard!**



## SOLAIS DESIGNED TIR OPTICS

Best-in-class performance, delivering excellent beam control that is clean, smooth and precise.

## MODULE ACCESSORY CLIP

Holds a field-replaceable lens or louver.



## ADJUSTABLE COLLARS

Collars have two tabs that self-compress with the twist of a phillips screw, allowing even more versatility in ceiling thickness applications from 1/2" to 1 3/8".

## TRIM VARIETY


16 available trim options: round or square; flanged or flangeless; straight down, flat pinhole, adjustable or lensed wall-wash. Pre-installed tension clip allows for a lens accessory on the trim.

# Hit the trifecta with quality, performance and budget


ST2 Arm  
theella

## Trim Details and Offerings

Shapes



Round




Square


Ceiling

Thicknesses:

- 1/2" - 3/4"
- 3/4" - 1-3/4"




Gypsum



Wood

Trims

Flanged




Beveled Down Flanged




Beveled Wall Wash Flanged

Flat Pinhole Flanged




Flat Pinhole Flanged




Beveled Adjustable Flanged

Flangeless




Beveled Down Flangeless




Wall Wash Flangeless

Flat Pinhole Flangeless




Flat Pinhole Flangeless




Beveled Adjustable Flangeless

Finishes


Consult factory for custom finishes



Perfect White



Brown



Black

## Performance Packages

- 8W; 700 delivered lumens
- 10W; 900 delivered lumens



## Adjustability


0° tilt



40° tilt




## Beam Spreads

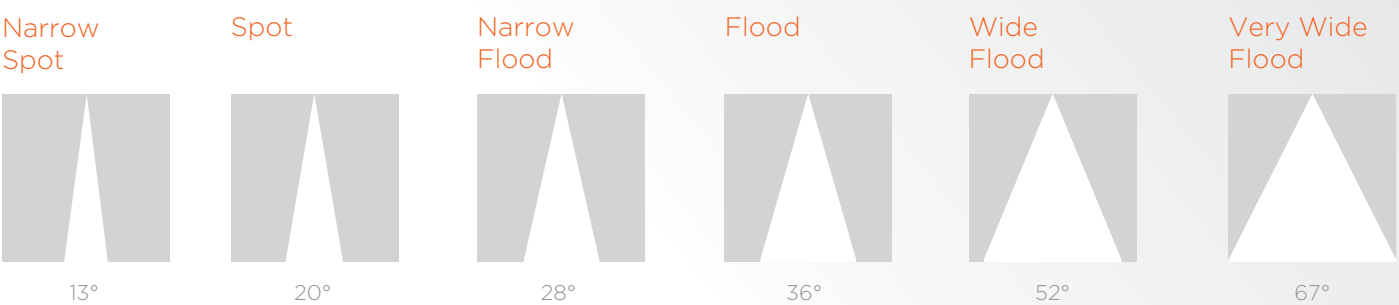

## CRIs

• 95 CRI Standard | • 98+ CRI Option

## Color Temperatures

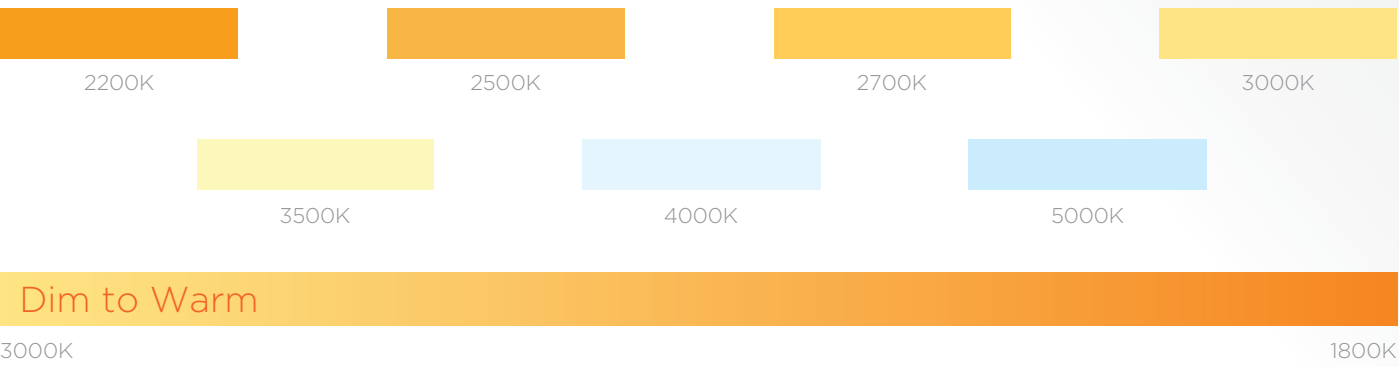

## Installation Options

